


6	Providing dry trap/granite/gneiss Rubble stone soling 15cm to 20cm. thick including hand pack and compacting complete. Spec.no. Bd.A. 12page no.264	16.7	CuM	1294.00	21609.80
7	Providing and casting in situ cement M-20 of trap granite/quartzite/gneiss metal for R.C.C. columns as per detailed designs and drawing or as directed including centering form work, compaction finishing the formed surface with cm 1:3 of sufficient minimum thickness to give a smooth and even surface if special finish is to be provided and curing (Excluding reinforcement) Spec.No.:Bd.F.4 Page No. 298/	6.2	CuM	12528.00	77673.60
8	Providing and casting in situ cement M-20 of trap granite /quartzite/gneiss metal for R.C.C. Beams & lintels as per detailed designs and drawing or as direc- ted including centering form work, compaction finishing the formed surface with cm 1:3 of suffi- cient minimum thickness to give a smooth and even surface if special finish is to be provided and curing (Exculding reinforc- ement) Spec.No.:Bd.F.6 Page No.300/ IS 456 (1978)	8.45	CuM	11104.00	93828.80
9	Providing and fixing in positing mild steel/HYSD bar reinforcement of various diameters for R.C.C. pile caps, footings, foundations . slabs, beams columns canopies, fins, arches etc. as per detailed designs. drawings and schedules including cutting,bending,hooking the as required completed. Spec.No.:Bd. F.17	1.68	MT	65117.00	109396.56
10	Providing second class Burnt Brick masonry with conventional/				



सौ. प्रमिला मोहन पूवा २ *Omada*


अध्यक्ष व्यवस्थापक
विशा लोकसंचलीत साधन केंद्र
बेराडी, ता शिरपूर, जि धुळे

	Spec. No. BDU 1 Page No. 537	3.74	Sqm	1100.00	4114.00
16	Providing and fixing in position Double annodised window of various size with including making the damaged structure to its original condition.	3.85	Sq.m.	5117.00	19700.45
17	Providing and fixing Door shutters c.c.t. w. including iron fixtures & fastening & T.W. beading at junctions of panels inserted including three coats of oil painting complete.	3.47	Sqm	3212.00	11145.64
18	Providing and laying Vitrified tiles flooring BDM14 600mm x 600 size & of required thk on a bed of 1:6 c:m including cement float, polishing & cleaning complete Spec.No.:Bd.M.14 Page No.386	136.04	Sqm	1124.00	152908.96
TOTAL					1343601.81
Add 5% for Contengencies					67180.09
Add 5% for Plumbing & Sanitation					67180.09
Total Amount					1477961.99
Say Rs.					1477962.00
IN WORD :-					
FOURTEEN LAKH SEVENTY SEVEN THOUSAND NINE HUNDRED SIXTY TWO RUPEES					



सं. प्रशासक ममन पवार @male

अध्यक्ष व्यवस्थापक
विशा लोकसंचालन साधन केंद्र
बोराडी, ता शिरपुर, जि धुळे




PROPOSED CONSTRUCTION PLAN OF WORKING SHED ON P. NO- 304 AT- BORADI, TAL- SHERPUR, DIST- DHULE

AREA STATEMENT	SQ. MTR.
TOTAL AREA OF P. NO. 304	279.07
PROPOSED BUILT UP AREA	144.90


OWNER'S PHOTOGRAPH

DESHA LORBAWALIT SARDHAR KEMERA


APPROVING AUTHORITY

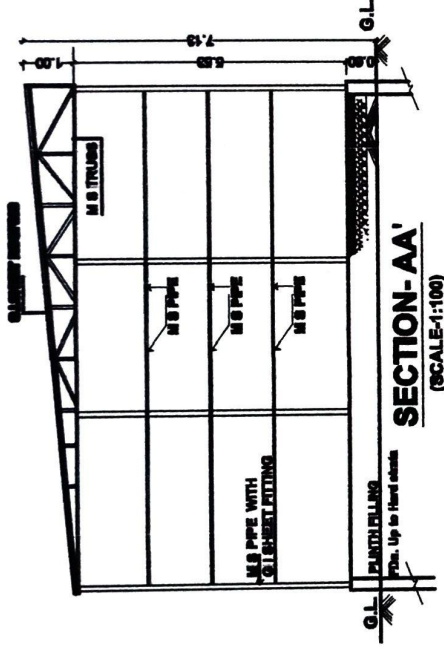


SECTION-AA'
(SCALE-1:100)

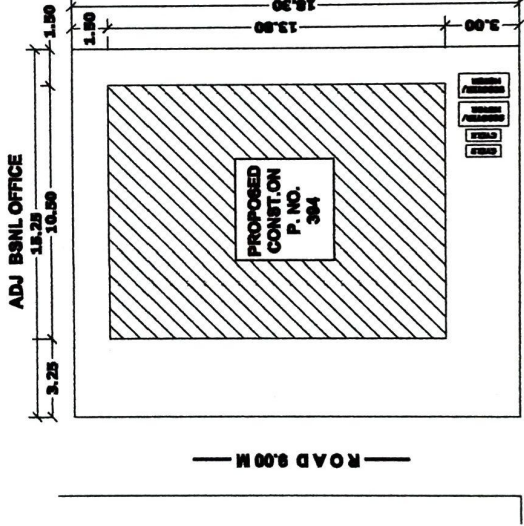

SITE PLAN
(SCALE-1:200)

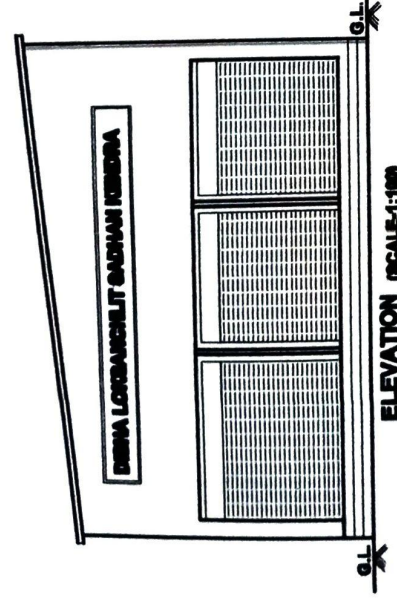

ELEVATION
(SCALE-1:100)

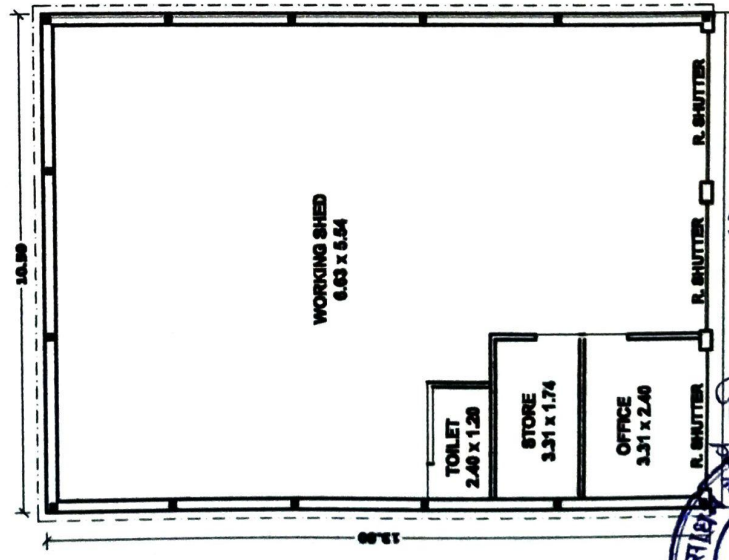

FLOOR PLAN
(SCALE-1:100)

Ornelis

विशा लोकसंचलीत साधन केंद्र
बोराडी त शिरूर, जि धुळे

