

ESTIMATE

Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarth Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

Estimated Cost of Works (Rs.) :- 18900000.00

Rupees One Crore Eighty Nine Lakh Only.

SAI CONSULTANT'S

Consulting Civil Engineer, Builders & Developers,
Approved Valuers, Chartered Engineer & Govt. Contractors.

Shop no.2, Shraddha Building, Gokul Colony,
Collage Road, Rahuri, Tal-Rahuri, Dist-A'Nagar.
Mo.9970253888,9552183333
email-saiconsultants333888@gmail.com

SAI CONSULTANT'S

Refno.

Date:-

Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21
Paiki, For Sewarth Agro Producer Co.ltd, At-Anbhora, Tal-Murtijapur, Dist: Akola (MH)

RECAPITUALTION SHEET

1	S.W. I - W.H. Building + PEB	Rs.	13236002.00
2	S.W. II - Internal Bituminous roads	Rs.	1863506.00
3	Add Royalty WH + Road	Rs.	371638.28
4	Add Testing Charges	Rs.	98520.00
5	Add.18.00 % GST W.H. Building	Rs.	2382480.00
		A) Total Rs.	17952146.28
6	Add. 3% Contigencies on Total	Rs.	538686.00
7	Add. 1.00 % Insurance on Part A	Rs.	179521.00
		Total Rs.	18670353.28
8	Sub Work No:-III Electrification	Rs.	189791.00
		Total Rs.	189791.00
9	Add.18.00 % GST On Electrical Work	Rs.	34162.00
10	Add. 3% Contigencies on Elecrical	Rs.	5694.00
		B) Total Rs.	229647.00
		Grand Total (A+B) Rs.	18900000.28
		Say Rs.	18900000.00

Rupees One Crore Eighty Nine Lakh Only.

Rajendra
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(Civil) A.M.I.E.
Chartered Engineer
AM3023322

Badh
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Searth Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. I - W.H.Building

ABSTRACT

Quantity	I.No	Item of work	Rate	unit	Amount
118.84	1	Excavation for foundation in earth, soil of all types, sand, gravel and soft murum, including removing the excavated material up to a distance of 50 m.beyond the building area & stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering Including shoring and strutting etc. complete. (LIFT UPTO 1.5 M.) By Mechanical Means	207.00	Cubic Metre	24599.88
63.42	2	Excavation for foundation in Hard murum in cluding removing the excavated material upto adistance of 50 metres beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary backfilling, ramming, watering including shoring and strutting etc. complete. (Lift from 1.5 to 3.0m.) By Mechanical Means	284.00	Cubic Metre	18011.28
224.02	3	Providing dry trap/ granite/ quartzite/ gneiss rubble stone soiling 15 cm to 20 cm thick including hand packing and compacting complete. Spec.No. : Bd.A.12 Page No. 264 ;	1703.99	Cubic Metre	381727.84
182.26	4	Filling in plinth and floors with approved excavated material in 15cm. to 20cm. layersincluding watering and compacting etc. complete.	120.00	Cubic Metre	21871.20
496.22	5	Filling in plinth and floors with contractors material/ brought from outside and approved by Engineer in charge in layers of 15 cm to 20 cm including watering and compaction etc.complete.	1047.22	Cubic Metre	519651.51
45.96	6	Providing and filling in the foundation with sand of approved quality including watering, compacting etc. complete. (To be executed with prior approval of Superintending Engineer)	2505.15	Cubic Metre	115136.69
100.33	7	Providing and laying Cast in situ/ Ready Mix cement concrete in M-10 of trap/granite/quartzite/ gneiss metal for foundation and bedding including bailing out water, Steel centering, formwork, laying/pumping, compacting, roughening them if special finish is to be provided, finishing if required and curing complete ,with fully automatic microprocess or base dPLCwith SCADA enable dreversible Drum Type mixer/ concrete Batch mix plant (Panmixer) etc.complete. With fine aggregate (Crushed sand VSI Grade)	6262.59	Cubic Metre	628325.65



Quantity	I.No	Item of work	Rate	unit	Amount
28.53	8	Providing and laying in situ cement concrete of M-25 grade of trap / granite/quartzite/gneiss metal for R.C.C. work like raft, grillages, strips, foundations and footings of R.C.C.columns and steel stanchions including bailing-out water manually, including centering formwork of plywood / steel, compaction, covering newly laid concrete by gunny bag, plastic or tarpaulin, finishing the formed surface with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc complete. (Excluding reinforcement) The cement mortar 1:3 plaster is considered for rendering uneven and honeycombed surface only. (Wooden planks / shuttering will not be allowed) Spec.No.:Bd.F.2 Page No. 298 /IS 456 (1978)	7709.71	Cubic Metre	219958.03
27.91	9	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap / granite /quartzite/ gneiss metal for R.C.C. columns as per detailed designs and drawing or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction finishing the formed surfaces with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc. complete,(Excluding reinforcement and structural steel).with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Natural Sand / Crushed sand VSI Grade finely washed etc)	14389.71	Cubic Metre	401616.81
57.97	10	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap / granite /quartzite/ gneiss metal for R.C.C. beams and lintels as per detailed designs and drawings or as directed including steel centering, formwork, cover blocks, laying/pumping, compactionand roughening the surface if special finish is to be provided and curing etc. complete. (Excluding reinforcement and structural steel). with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Natural Sand / Crushed sand VSI Grade finely washed etc)	12861.55	Cubic Metre	745584.05



Quantity	I.No	Item of work	Rate	unit	Amount
3.37	11	Providing and laying Cast in situ/Ready Mix cement concrete in M-20 of trap / granite/gneiss/ quartzite metal for R.C.C. fins of required thickness in position as shown on the drawings or as directed by Engineer -in-charge including steel centering, plywood / steel form work, steel props, laying/ pumping, compaction ,finishing uneven and honey combed surface with C.M.1:3 of sufficient minimum thickness to give a smooth and even surface or roughening the surface if special finish is to be provided and curing etc. complete. (Excluding reinforcement, including cover block) Newly laid concrete shall be covered by gunny bag, plastic, tarpaulin etc. with fully automatic microprocess or based PLC with SCADA enable reversible Drum Type mixer/ concrete Batchmix plant (Panmixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	18007.94	Cubic Metre	60686.76
4.44	12	Providing and casting in situ cement concrete of M-25 grade of trap granite / quartzite / gneiss metal for R.C.C. slabs and landings as per detailed designs and drawings or as directed including fixing plastic cover block of required size at 27 Nos in per 10 Sqm to reinforcement to give a clear cover of 15mm in RCC slabs, fixing fan hook box of 100mm diameter PVC or MS material with required depth with holes or notches as required, bottom with 12mm diameter M.S. bar bend to shape with hooked ends for fan hook and painting to exposed surface, centering, formwork of steel, compaction, covering newly laid concrete by gunny bag, plastic or tarpaulin, finishing the formed surface with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc. complete. (Excluding reinforcement. The cement mortar 1:3 plaster is considered for rendering uneven and honeycombed surface only. Wooden planks / shuttering will not be allowed). Bd.F.8 Page No. 302 / IS 456:2000	14538.71	Cubic Metre	64551.87
10.60	13	Providing and fixing in position TMT - FE - 500 bar reinforcement of various diameters for R.C.C. pile caps, footings, foundations, slabs, beams columns, canopies, staircase, newels, chajjas, lintels, piers, copings, fins, arches etc. as per detailed designs, drawings and schedules. including cutting, bending, hooking the bars, binding with wires or tack welding and supporting as required complete.	89703.00	Metric Tonne	950851.80



Quantity	I.No	Item of work	Rate	unit	Amount
74.26	14	Providing dry rubble stone pitching 23cm (about 9) thick including all material, quarry spalls, labour etc.complete.	734.99	Square Metre	54580.36
25.30	15	Providing Brick masonry in cement mortal 1.6 using second Class Burnt Bricks in foundation and plinth of inner walls/ in plinth of external walls including bailing out water manually, striking joints on unexposed faces ,watering and scaffolding complete Bd. G. 1, Page No.313,	7873.70	Cubic Metre	199204.61
136.09	16	Providing second class Burnt Brick masonry with conventional/ I.S. type bricks in cement mortar 1:6 in superstructure including striking joints, raking out joints, watering and scaffolding etc. Complete	8112.70	Cubic Metre	1104057.34
1703.63	17	Providing sand faced plaster externally in cement mortar using approved screened sand, in all positions including base coat of 15 mm thick in cement mortar 1:4 using waterproofing compound at 1 kg per cement bag curing the same for not less than 2 days and keeping the surface of the base coat rough to receive the sand faced treatment 6 to 8 mm thick in cement mortar 1:4 finishing the surface by taking out grains and curing for fourteen days scaffolding etc.complete.	651.70	Square Metre	1110255.67
56.45	18	Providing and fixing steel ventilat or fully glazed partly fixed as per detailed drawing with hot dip zinc coating including fabricating glazing with plain/ obscured glass pans 5mm thick and approved type quality and iron oxidized fixtures and fastening with guards quare bars 12mm 10cmc /cand oil painting 2coats etc. complete.	4827.00	Square Metre	272484.15
1703.63	19	Providing and applying white-wash in one coat on old/ new plastered or masonry surfaces and asbestos cement sheets including scaffolding and preparing the surface by brushing and brooming down etc. complete.	8.00	Square Metre	13629.04
1703.63	20	Providing and applying plastic emulsion paint of approved quality, colour and shade to old and new surfaces in two coats including scaffolding, preparing the surface. (excluding the primer coat) etc. complete.	80.00	Square Metre	136290.40



Quantity	I.No	Item of work	Rate	unit	Amount
21.42	21	Providing and fixing rolling shutter fabricated from steel at hsofminimum thickness 0.9mm with lock plate of 3.15 mm thickness reinforced with 35x35x5mm angle section fitted with sliding bolts and handles for both sides, deep M.S.channel section of depth and thickness not less than 65mm and 3.15mm respectively with hold fastarr angements, M.S.Bracket plate 300x300x3.15mm minimum size and shape with square bar, suspension shaft of minimum 32mm diameter, hood cover of M.S. sheet not less than 0.9mm thickness and of any size attopand safety device sincluding mechanical gear operation arrangement consisting of worm gear wheels and worms of high grade castir on or mild steel and one coat of redlead primer etc. complete.(I.S.62481979) (Without mechanical gear)	4829.00	Square Metre	103437.18
924.00	22	Providing and laying in situ cement concrete M20 with tremix treatment for 100 mm thickness for flooring with groove cutting of 4mm wide and 20mm deep with necessary refilling with bitumen etc. complete.	837.74	Square Metre	774071.76
33.30	23	Providing structural steel work in trusses, other similar trussed purlins and members with all bracing, gusset plates etc. as per detailed designs and drawings or as directed including cutting, fabricating, hoisting, erecting fixing in position, Making riveted/ bolted/ welded connection and one coat of anti corrosive paint and over it 2 coats of oil painting approved quality and shade etc. complete.	119459.00	Metric Tonne	3977984.70
984.67	24	Providing and fixing colour coated Zinalume (R) AZ 150 (min150 gms /sq.mt. total on each side) profiled sheets for roofing. The feed materialis manufactured out of nominal 0.45mm Base Metal Thickness (BMT) (0.5mm TCT), Hi-strength steel with min. 550 MP a yield strength, metallic hot dip coated with Aluminium-Zinc alloy (55% aluminium 43.4% zinc 1.6% silicon) with COLOR BOND (R) steel quality super durable polyester paint coat (with in organic pigment). The paint shall have a total coating thickness of nominal 35um, comprising of nominal 25 um exterior coat on top surface and nominal 10um reverse coat on back surface. Profile sheet shall have nom. 950-1050 mm effective cover width and nominal 25-30 mm deep ribs with subtles quare flutingin the five panat nominal 180-250 mm center-to-center. The endrib shall be designed for anti-capillary groove. and return leg. The feed material should have coil manufacturers product details marked a regular interval. Including fasteners with min. fastened with min. 25um Zinc-Tinalloy coated, Hexhead, self-drilling screw etc. complete. (weight of profile 4.52Kilogram / Square Metre).	1173.00	Square Metre	1155017.91



Quantity	I.No	Item of work	Rate	unit	Amount
12.00	25	Turbo ventilator 24" MATERIAL RATES FOR SSR For Year 2021-22,Page no. 374, Building (Bd-R : Roofing and ceiling)	9702.00	No.	116424.00
41.40	26	Providing and fixing UPVC Roof made up of 3 layers roofing material of thickness 2mm having width of 1130mm and of required Length having Tensile strength not less than 330Kilo gram/ cm ² , including fastening with self drilling screw having washers made of stainless steel etc. complete.	1594.00	Square Metre	65991.60
				Total Rs.	13236002.09
			Part A)	Say Rs.	13236002.00
292.21	27	Royalty Charges for sand	237.37	Cum	69361.89
794.50		Royalty Charges for Rubble and HM	216.18	Cum	171755.01
1.00	28	Material Testing Charges	16405.00		16405.00
				Total Rs.	257521.90
			Part B)	Say Rs.	257522.00


 Chartered Engineer
Gaurav Rajendra Bhaskar
 B.E.(Civil) A.M.I.E.
 Chartered Engineer
 AM3023322


 Consulting Engineer
SAI CONSULTANT
 Consulting Civil Engineer
 Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewartha Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. I - W.H.Building

MEASUREMENT SHEET

I.No.

- 1 Excavation for foundation in earth, soil of all types, sand, gravel and soft murum, including removing the excavated material up to a distance of 50 m.beyond the building area & stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering Including shoring and strutting etc. complete. (LIFT UPTO 1.5 M.) By Mechanical Means

For RCC Coloumn Type C1	10	x	1.85	x	1.85	x	1.50	=	51.34	Cum
For RCC Coloumn Type C2	4	x	1.70	x	1.70	x	1.50	=	17.34	
For RCC Coloumn Type C3	4	x	1.80	x	1.80	x	1.50	=	19.44	
For RCC Coloumn Type C5	8	x	1.60	x	1.60	x	1.50	=	30.72	
									Total Qty	= 118.84 Cum

- 2 Excavation for foundation in Hard murum in cluding removing the excavated material upto adistance of 50 metres beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary backfilling, ramming, watering including shoring and strutting etc. complete. (Lift from 1.5 to 3.0m.) By Mechanical Means

For RCC Coloumn Type C1	10	x	1.85	x	1.85	x	0.90	=	30.80	Cum
For RCC Coloumn Type C2	4	x	1.70	x	1.70	x	0.75	=	8.67	
For RCC Coloumn Type C3	4	x	1.80	x	1.80	x	0.90	=	11.66	
For RCC Coloumn Type C5	8	x	1.60	x	1.60	x	0.60	=	12.29	
									Total Qty	= 63.42 Cum

- 3 Providing dry trap/ granite/ quartzite/ gneiss rubble stone soiling 15 cm to 20 cm thick including hand packing and compacting complete. Spec.No. : Bd.A.12 Page No. 264 ;

For RCC Coloumn Type C1	10	x	1.85	x	1.85	x	0.23	=	7.87	Cum
For RCC Coloumn Type C2	4	x	1.70	x	1.70	x	0.23	=	2.66	
For RCC Coloumn Type C3	4	x	1.80	x	1.80	x	0.23	=	2.98	
For RCC Coloumn Type C5	8	x	1.60	x	1.60	x	0.23	=	4.71	
Ware House Plinth	1	x	41.54	x	21.54	x	0.23	=	205.80	
									Total Qty	= 224.02 Cum

- 4 Filling in plinth and floors with approved excavated material in 15cm. to 20cm. layersincluding watering and compacting etc. complete.

Qty As per Exavated Quatity									=	182.26	cum
Item no.1 & 2											
									Total Qty	= 182.26 cum	

- 5 Filling in plinth and floors with contractors material/ brought from outside and approved by Engineer in charge in layers of 15 cm to 20 cm including watering and compaction etc.complete.

Ware House Plinth	1	x	40.34	x	20.34	x	0.65	=	533.34	cum
Deduction Internal side WH.	2	x	41.54	x	0.60	x	0.50	=	24.92	
Periphery Rubble fillig	2	x	20.34	x	0.60	x	0.50	=	12.20	
										37.12
									Total Qty	= 496.22 cum



- 6 Providing and filling in the foundation with sand of approved quality including watering, compacting etc. complete. (To be executed with prior approval of Superintending Engineer)

Deduction Internal side WH. Periphery Rubble fillig	2	x	41.54	x	0.60	x	0.05	=	2.49	cum
	2	x	20.34	x	0.60	x	0.05	=	1.22	
Ware House Flooring Soling	1	x	41.54	x	20.34	x	0.05	=	42.25	
Total Qty									=	45.96 cum

- 7 Providing and laying Cast in situ/ Ready Mix cement concrete in M-10 of trap/granite/quartzite/ gneiss metal for foundation and bedding including bailing out water, Steel centering, formwork, laying/pumping, compacting, roughening them if special finish is to be provided, finishing if required and curing complete ,with fully automatic microprocess or base dPLCwith SCADA enable dreversible Drum Type mixer/ concrete Batch mix plant (Panmixer) etc.complete. With fine aggregate (Crushed sand VSI Grade)

For RCC Coloumn Type C1	10	x	1.85	x	1.85	x	0.10	=	3.42	cum
For RCC Coloumn Type C2	4	x	1.70	x	1.70	x	0.10	=	1.16	
For RCC Coloumn Type C3	4	x	1.80	x	1.80	x	0.10	=	1.30	
For RCC Coloumn Type C5	8	x	1.60	x	1.60	x	0.10	=	2.05	
Ware House Plinth	1	x	42.00	x	22.00	x	0.10	=	92.40	cum
Total Qty									=	100.33 cum

- 8 Providing and laying in situ cement concrete of M-25 grade of trap / granite/quartzite/gneiss metal for R.C.C. work like raft, grillages, strips, foundations and footings of R.C.C.columns and steel stanchions including bailing-out water manually, including centering formwork of plywood / steel, compaction, covering newly laid concrete by gunny bag, plastic or tarpaulin, finishing the formed surface with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc complete. (Excluding reinforcement) The cement mortar 1:3 plaster is considered for rendering uneven and honeycombed surface only. (Wooden planks / shuttering will not be allowed) Spec.No.:Bd.F.2 Page No. 298 /IS

1st Step of Footing

For RCC Coloumn Type C1	10	x	1.55	x	1.55	x	0.38	=	9.13	cum
For RCC Coloumn Type C2	4	x	1.40	x	1.40	x	0.38	=	2.98	
For RCC Coloumn Type C3	4	x	1.50	x	1.50	x	0.38	=	3.42	
For RCC Coloumn Type C5	8	x	1.30	x	1.30	x	0.38	=	5.14	
2nd Step of Footing										
For RCC Coloumn Type C1	10	x	1.25	x	1.25	x	0.23	=	3.59	
For RCC Coloumn Type C2	4	x	1.10	x	1.10	x	0.23	=	1.11	
For RCC Coloumn Type C3	4	x	1.20	x	1.20	x	0.23	=	1.32	
For RCC Coloumn Type C5	8	x	1.00	x	1.00	x	0.23	=	1.84	
Total Qty									=	28.53 cum

- 9 Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap / granite /quartzite/ gneiss metal for R.C.C. columns as per detailed designs and drawing or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction finishing the formed surfaces with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc. complete,(Excluding reinforcement and structural steel).with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Natural Sand / Crushed sand VSI Grade finely washed etc)

For RCC Coloumn Type C1	10	x	0.30	x	0.60	x	6.62	=	11.92	cum
-------------------------	----	---	------	---	------	---	------	---	-------	-----



For RCC Coloumn Type C2	4	x	0.30	x	0.60	x	6.47	=	4.66
For RCC Coloumn Type C3	4	x	0.60	x	0.60	x	6.62	=	9.53
For RCC Coloumn Type C5	8	x	0.23	x	0.45	x	2.17	=	1.80
							Total Qty	=	27.91 cum

- 10 Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap / granite /quartzite/ gneiss metal for R.C.C. beams and lintels as per detailed designs and drawings or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction and roughening the surface if special finish is to be provided and curing etc. complete. (Excluding reinforcement and structural steel). with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Natural Sand / Crushed sand VSI Grade finely washed etc)

Long Wall Ground Beams	12	x	6.63	x	0.35	x	0.75	=	20.88
Short Wall Ground Beams	6	x	6.82	x	0.35	x	0.75	=	10.74
Varandah Plinth Beams Long	4	x	5.33	x	0.23	x	0.45	=	2.21
Varandah Plinth Beams Short	8	x	1.60	x	0.23	x	0.38	=	1.12
Long & Short Wall above V2	44	x	0.95	x	0.23	x	0.30	=	2.88
Long Wall Lintel Beams	8	x	6.63	x	0.23	x	0.45	=	5.49
Long Wall Beams Above RS	4	x	6.24	x	0.23	x	0.38	=	2.18
Long Wall Floor Beams	12	x	6.63	x	0.23	x	0.45	=	8.23
Short Wall Floor Beams	6	x	6.82	x	0.23	x	0.45	=	4.24
							Total Qty	=	57.97 cum

- 11 Providing and laying Cast in situ/Ready Mix cement concrete in M-20 of trap / granite/gneiss/ quartzite metal for R.C.C. fins of required thickness in position as shown on the drawings or as directed by Engineer -in-charge including steel centering, plywood / steel form work, steel props, laying/ pumping, compaction, finishing uneven and honey combed surface with C.M.1:3 of sufficient minimum thickness to give a smooth and even surface or roughening the surface if special finish is to be provided and curing etc. complete. (Excluding reinforcement, including cover block) Newly laid concrete shall be covered by gunny bag, plastic, tarp aulin etc. with fully automatic microprocess or based PLC with SCADA enable dreversible Drum Type mixer/ concrete Batchmix plant (Panmixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)

Long Wall Ventilators V2 Top	22	x	1.80	x	0.45	x	0.075	=	1.34
Long Wall Ventilators V1 Top	48	x	1.25	x	0.45	x	0.075	=	2.03
							Total Qty	=	3.37 cum

- 12 Providing and casting in situ cement concrete of M-25 grade of trap granite / quartzite / gneiss metal for R.C.C. slabs and landings as per detailed designs and drawings or as directed including fixing plastic cover block of required size at 27 Nos in per 10 Sqm to reinforcement to give a clear cover of 15mm in RCC slabs, fixing fan hook box of 100mm diameter PVC or MS material with required depth with holes or notches as required, bottom with 12mm diameter M.S. bar bend to shape with hooked ends for fan hook and painting to exposed surface, centering, formwork of steel, compaction, covering newly laid concrete by gunny bag, plastic or tarpaulin, finishing the formed surface with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc. complete. (Excluding reinforcement. The cement mortar 1:3 plaster is considered for rendering uneven and honeycombed surface only. Wooden planks / shuttering will not be allowed). Bd.F.8 Page No. 302 / IS 456:2000

Varandah Plinth Slab	4	x	5.64	x	1.60	x	0.123	=	4.44
							Total Qty	=	4.44 cum

- 13 Providing and fixing in position TMT - FE - 500 bar reinforcement of various diameters for R.C.C. pile caps, footings, foundations, slabs, beams columns, canopies, staircase, newels, chajjas, lintels pardis, copings, fins, arches etc. as per detailed designs, drawings and schedules. including cutting, bending, hooking the bars, binding with wires or tack welding and supporting as required complete.

For RCC Footing	28.53	@	75.00	Kg	=	2139.75	Kg
For RCC Coloumn	27.91	@	80.00	Kg	=	2232.80	Kg
For RCC Beam	57.97	@	95.00	Kg	=	5507.15	Kg



For RCC Fins
For RCC Slab

Page 4

3.37	@	90.00	Kg	=	303.30	Kg
4.44	@	95.00	kg	=	421.80	kg
Total Qty				=	10604.80	Kg
Say				=	10.60	MT

- 14 Providing dry rubble stone pitching 23cm (about 9) thick including all material, quarry spalls, labour etc.complete.

Long Wall Internal Side Over size Metal in 2 Layers	2	x	41.54		x	0.60	=	49.85	Sqm	
Short Wall Internal Side Over size Metal in 2 Layers	2	x	20.34		x	0.60	=	24.41		
Total Qty								=	74.26	Sqm

- 15 Providing Brick masonry in cement mortal 1.6 using second Class Burnt Bricks in foundation and plinth of inner walls/ in plinth of external walls including bailing out water manually, striking joints on unexposed faces ,watering and scaffolding complete Bd. G. 1, Page No.313,

Long Wall Ground Beams	12	x	6.63	x	0.35	x	0.60	=	16.71	cum
Short Wall Ground Beams	6	x	6.82	x	0.35	x	0.60	=	8.59	
Total									25.30	
Total Qty								=	25.30	cum

- 16 Providing second class Burnt Brick masonry with conventional/ I.S. type bricks in cement mortar 1:6 in superstructure including striking joints, raking out joints, watering and scaffolding etc. Complete

Long Wall Superstructure	12	x	6.63	x	0.23	x	5.20	=	95.15	cum
Short Wall Superstructure	6	x	6.82	x	0.23	x	5.20	=	48.94	cum
Short Wall Superstructure	2	x	10.77	x	0.23	x	2.00	=	9.91	
Total								=	154.00	
Deduction For V2	44	x	0.60	x	0.60	x	0.23	=	3.64	
Deduction For V1	48	x	1.41	x	0.60	x	0.23	=	9.34	
Deduction For RS	4	x	2.10	x	2.55	x	0.23	=	4.93	
Total								=	17.91	
Total Qty								=	136.09	cum

- 17 Providing sand faced plaster externally in cement mortar using approved screened sand, in all positions including base coat of 15 mm thick in cement mortar 1:4 using waterproofing compound at 1 kg per cement bag curing the same for not less than 2 days and keeping the surface of the base coat rough to receive the sand faced treatment 6 to 8 mm thick in cement mortar 1:4 finishing the surface by taking out grains and curing for fourteen days scaffolding etc.complete.

Long Wall	2	x	42.49		x	6.35	=	539.62	Sqm
Short Wall	2	x	22.39		x	6.35	=	284.35	
Long Wall Inner side	2	x	41.54		x	5.15	=	427.86	
Short Wall Inner side	2	x	21.54		x	5.15	=	221.86	
Short Span Gable Walls External	2	x	10.77		x	2.00	=	43.08	
Short Span Gable Walls Internal	2	x	10.77		x	2.00	=	43.08	
Long Wall Coloumn Offsets C1	10	x	0.39		x	5.15	=	20.09	
Long Wall Coloumn Offsets C2	4	x	0.39		x	5.15	=	8.03	
Long Wall Coloumn Offsets C2	4	x	0.39		x	5.15	=	8.03	



Long Wall Coloumn Offsets C5	8	x	1.36	x	1.20	=	13.06	
Verandah Slab	4	x	6.10	x	1.83	=	44.65	
Verandah Slab Sides	8	x	1.83	x	0.38	=	5.56	
Verandah Slab Front	4	x	6.10	x	0.45	=	10.98	
V2 Top two sides	88	x	2.00	x	0.60	=	105.60	
V1 Top two sides	96	x	1.45	x	0.60	=	83.52	
							Total	1859.37
Deduction								
Deduction For V2 Both Side	88	x	0.60	x	0.60	=	31.68	
Deduction For V1 Both Side	96	x	1.41	x	0.60	=	81.22	
Deduction For RS Both Side	8	x	2.10	x	2.55	=	42.84	
							Total	155.74
							Total Qty =	1703.63 Sqm

- 18 Providing and fixing steel ventilat or fully glazed partly fixed as per detailed drawing with hot dip zinc coating including fabricating glazing with plain/ obscured glass pans 5mm thick and approved type quality and iron oxidized fixtures and fastening with guards quare bars 12mm 10cmc /cand oil painting 2coats etc. complete.

V2	44	x	0.60	x	0.60	=	15.84	Sqm
V1	48	x	1.41	x	0.60	=	40.61	
							Total Qty =	56.45 Sqm

- 19 Providing and applying white-wash in one coat on old/ new plastered or masonry surfaces and asbestos cement sheets including scaffolding and preparing the surface by brushing and brooming down etc. complete.

Qty.As per Item no.17						=	1703.63	Sqm
							Total Qty =	1703.63 Sqm

- 20 Providing and applying plastic emulsion paint of approved quality, colour and shade to old and new surfaces in two coats including scaffolding, preparing the surface. (excluding the primer coat) etc. complete.

Qty.As per Item no.17						=	1703.63	Sqm
							Total Qty =	1703.63 Sqm

- 21 Providing and fixing rolling shutter fabricated from steell at hsofminimum thickness 0.9mm with lock plate of 3.15 mm thickness reinforced with 35x35x5mm angle section fitted with sliding bolts and handles for both sides, deep M.S.channel section of depth and thickness not less than 65mm and 3.15mm respectively with hold fastarr angements, M.S.Bracekt plate 300x300x3.15mm minimum size and shape with square bar, suspension shaft of minimum 32mm diameter, hood cover of M.S. sheet not less than 0.9mm thickness and of any size atopand safety device sincluding mechanical gear operation arrangement consisting of worm gear wheels and worms of high grade castir on or mild steel and one coat of redlead primer etc. complete.(I.S.62481979) (Without mechanical gear)

RS 1	4	x	2.10	x	2.55	=	21.42	Sqm
							Total Qty =	21.42 Sqm

- 22 Providing and laying in situ cement concrete M20 with tremix treatment for 100 mm thickness for flooring with groove cutting of 4mm wide and 20mm deep with necessary refilling with bitumen etc. complete.

Warehouse Flooring	1	x	42.00	x	22.00	=	924.00	Sqm
							Total Qty =	924.00 Sqm



- 23 Providing structural steel work in trusses, other similar trussed purlins and members with all bracing, gusset plates etc. as per detailed designs and drawings or as directed including cutting, fabricating, hoisting, erecting fixing in position, Making riveted/ bolted/ welded connection and one coat of anti corrosive paint and over it 2 coats of oil painting approved quality and shade etc. complete.

Total No. of Truss With, Rafter

Purlin, Vertical Member, Runner & etc. 5 x 6340.00 x = 31700.00 MT

Verandah Canopy 4 x 400.00 x x = 1600.00

33300.00

Total Qty = 33.30 MT

- 24 Providing and fixing colour coated Zinalume (R) AZ 150 (min 150 gms /sq.mt. total on each side) profiled sheets for roofing. The feed material is manufactured out of nominal 0.45mm Base Metal Thickness (BMT) (0.5mm TCT), Hi-strength steel with min. 550 MP a yield strength, metallic hot dip coated with Aluminium- Zinc alloy (55% aluminium 43.4% zinc 1.6% silicon) with COLOR BOND (R) steel quality super durable polyester paint coat (with in organic pigment). The paint shall have a total coating thickness of nominal 35um, comprising of nominal 25 um exterior coat on top surface and nominal 10um reverse coat on back surface. Profile sheet shall have nom. 950-1050 mm effective cover width and nominal 25-30 mm deep ribs with subtle square fluting in the five panat nominal 180-250 mm center-to-center. The endrib shall be designed for anti-capillary groove. and return leg. The feed material should have coil manufacturers product details marked a regular interval. Including fasteners with min. fastened with min. 25um Zinc-Tin alloy coated, Hexhead, self-drilling screw etc. complete. (weight of profile 4.52 Kilogram /

Roof Slope 2 x 11.50 x 42.49 = 977.27 Sqm

Verandah 4 x 6.10 x 2.00 = 48.80

Total 1026.07

Deduction For Turbo Ventilator & Sky light Upvc roof 12.00 x 3.00 x 1.15 = 41.40

Total 41.40

Total Qty = 984.67 Rmt

- 25 Turbo ventilator 24" MATERIAL RATES FOR SSR For Year 2021-22, Page no. 374, Building (Bd-R : Roofing and ceiling)

At Roof Level Ventilation = 12.00 No.

Total Qty = 12.00 No.

- 26 Providing and fixing UPVC Roof made up of 3 layers roofing material of thickness 2mm having width of 1130mm and of required Length having Tensile strength not less than 330Kilo gram/ cm², including fastening with self drilling screw having washers made of stainless steel etc. complete.

12.00 x 3.00 x 1.15 = 41.40 Sqm

Total Qty = 41.40 Sqm

- 27 Royalty Charges

Material	Qty	Qty of Material	Cum
6 Providing and filling in the foundation	1 x 45.96 x 1.000	= 45.96	Cum
7 Providing and laying Cast in situ/ R	1 x 100.33 x 0.470	= 47.16	
8 Providing and laying in situ cement	1 x 28.53 x 0.425	= 12.13	
9 Providing and laying Cast in situ/R	1 x 27.91 x 0.425	= 11.86	
10 Providing second class Burnt Brick	1 x 57.97 x 0.425	= 24.64	
11 Providing sand faced plaster external	1 x 3.37 x 0.425	= 1.43	



12	Providing and casting in situ cemen	1	x	4.44	x	0.425	=	1.89			
15	Providing Brick masonry in cement	1	x	25.30	x	0.320	=	8.10			
16	Providing second class Burnt Brick	1	x	136.09	x	0.320		43.55			
17	Providing sand faced plaster extern	1	x	1703.63	x	0.033		56.22			
22	Providing and laying in situ cement	1	x	924.00	x	0.043		39.27			
							Sand	Total Qty	=	292.21	Cum
3	Providing dry trap/ granite/ quartzit	1	x	224.02	x	1.00	=	224.02			
5	Filling in plinth and floors with con	1	x	496.22	x	1.00	=	496.22			
14	Providing dry rubble stone pitching	1	x	74.26	x	1.00		74.26			
							Hm and Rubble	Total Qty	=	794.50	Cum

Gaurav
Chartered Engineer

Gaurav Rajendra Bhaskar
B.E.(Civil) A.M.I.E.
Chartered Engineer
AM3023322

Sadh
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Palaki, For Sewarath Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W.1 - W.H. Building

RATE ANALYSIS AS PER PWD SSR 2022-23 For MAHARASHTRA STATE

Sr. No.	Description of Item	S.S.R. Page No. & It. No.	Basic Rate	Add extra lead charges for.....						Total Lead charges	Gross Rate
				Rubble/Cr. Metal	Sand	Cr. Metal	Murum	Cement/Steel			
				321.99	345.15/M ³	263.19/M ³	252.22/M ³	5.22/M.T.			
1	Excavation for foundation in earth, soil of all types, sand, gr	21.02	207.00						0.00	207.00	
2	Excavation for foundation in Hard murum in cluding remov	21.08	284.00						0.00	284.00	
3	Providing dry trap/ granite/ quartzite/ gneiss rubble stone so	21.38	1382.00	1.00					321.99	1703.99	
4	Filling in plinth and floors with approved excavated materia	21.36	120.00						0.00	120.00	
5	Filling in plinth and floors with contractors material/ brough	21.37	795.00				1.00	252.22		1047.22	
6	Providing and filling in the foundation with sand of approve	21.39	2160.00		1.00	345.15			252.22	2505.15	
7	Providing and laying Cast in situ/ Ready Mix cement concre	24.01	5830.00		0.47	162.22	0.940	247.40		6262.59	
8	Providing and laying in situ cement concrete of M-25 grade	25.13	7287.00		0.425	146.69	0.90	236.87		7709.71	
9	Providing and laying Cast in situ/Ready Mix cement concre	25.33	13967.00		0.425	146.69	0.90	236.87		14389.71	
10	Providing and laying Cast in situ/Ready Mix cement concre	25.52	12452.00		0.425	146.69	0.85	223.71		12861.55	
11	Providing and laying Cast in situ/Ready Mix cement concre	26.31	17601.00		0.425	146.69	0.85	223.71		18007.94	
12	Providing and casting in situ cement concrete of M-25 grade	25.72	14116.00		0.425	146.69	0.90	236.87		14538.71	
13	Providing and fixing in position TMT - FE - 500 bar reinfor	26.33	89703.00						0.00	89703.00	
14	Providing dry rubble stone pitching 23cm (about 9) thick in	2.34	413.00	1.00					321.99	734.99	
15	Providing Brick masonry in cement mortar 1.6 using second	27.01	7755.00		0.32	110.45				7873.70	
16	Providing second class Burnt Brick masonry with conventio	27.05	7994.00		0.32	110.45		1.58	8.25	8112.70	
17	Providing sand faced plaster externally in cement mortar usi	32.11	639.00		0.033	11.39				651.70	
18	Providing and fixing steel ventilat or fully glazed partly fixe	39.30	4827.00					0.25	1.31	4827.00	
19	Providing and applying white-wash in one coat on old/ new	36.02	8.00						0.00	8.00	
20	Providing and applying plastic emulsion paint of approved c	36.12	80.00						0.00	80.00	
21	Providing and fixing rolling shutter fabricated from steel at	39.24	4829.00						0.00	4829.00	
22	Providing and laying in situ cement concrete M20 with trem	33.30	796.00		0.043	14.67	0.089	23.42		837.74	
23	Providing structural steel work in trusses, other similar truss	23.04	119459.00					0.70	3.65	119459.00	
24	Providing and fixing colour coated Zincalume (R) AZ 150 (38.34	1173.00						0.00	1173.00	
25	Turbo ventilator 24" MATERIAL RATES FOR SSR For Yd	SSR 22-23, Page no. 374 Lno.42	9702.00						0.00	9702.00	
26	Providing and fixing UPVC Roof made up of 3 layers roofri	38.37	1594.00						0.00	1594.00	
27	Royalty Charges for Rubble and HM		216.18						0.00	216.18	

Gaurav Rajendra Bhaskar
Chartered Engineer
B.E. (Civil) A.M.I.E.
Chartered Engineer
AM2022277

SAI CONSULTANT
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarth Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. I - W.H.Building

Appendix - I

Lead Chart

Sr. No.	Description	Rubble	Murum	Crush metal	Crush metal 40 mm above	Sand	Cement	Steel	Asphalt
1	2	3	4	4	4	5	6	7	8
	Source	Restricted	Local	Restricted	Restricted	Restricted	Local	Local	
1	Average lead as per Quarry chart in km	5.00	5.00	5.00	5.00	10.00	1.00	1.00	
2	Lead charges	321.99	252.22	263.19	252.22	345.15	104.39	104.39	
4	Extra lead charges	321.99	252.22	263.19	252.22	345.15	104.39	104.39	
5	Extra lead charges per bag of cement						5.22		

Gaurav Rajendra Bhaskar
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(Civil) A.M.I.E.
Chartered Engineer
AM3023322

Sai
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarath Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. 1 - W.H.Building

TESTING CHART

Item	Qty	Soil/HM	Bitumen	Metal	Agg.	Tests	Frequency	Total Test	At Site	At Lab	Rate	Amt
Concrete												
		Cement										
		Sand										
M 10	100.33	22.07	47.16		Agg							
M 20	95.77	33.52	4.07		94.31	Comp. Strength- Cube		9	5	6	690.00	4140.00
M 25	114.41	42.90	4.86		86.19							0.00
Total	310.51	98.50	56.09		283.47	Crush Metal-Basic Test	1/1000 Cum	3	2	1	2600.00	2600.00
		MT	Cum		Cum	Gradation	1/100 Cum	3	2	2	745.00	1490.00
						Comboned Flakiness & Elongation of single metal	1/400 Cum	2	1	1	850.00	850.00
						Cement-Fineness, consistency, Setting time, Compressive strength, Specific Gravity	1/50 MT	1	1	1	3770.00	3770.00
						Sand-Fineness Modulus, Silt Content	1/ Source	1	1	1	1380.00	1380.00
						Water Absorption (Set of 5 Bricks), Compressive Strength(Set of 5 Bricks), Efflorescence (Set of 5 Bricks).	Set of 5 Bricks	1	1	1	2175.00	2175.00
						GSB Mix Design./Cement Treated Sub Base (CTSSB)		2	1	1	16250.00	16250.00
						Concrete Mix Design (With all Tests on basic materials)		2	1	1	13755.00	13755.00
											Total	46410.00

Rajendra Bhaskar
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(Civil) A.M.I.E.
Chartered Engineer
AM3023322


Zadh
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarath Agro Producer Co.Ltd.,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. I - W.H. Building

Quarry Chart

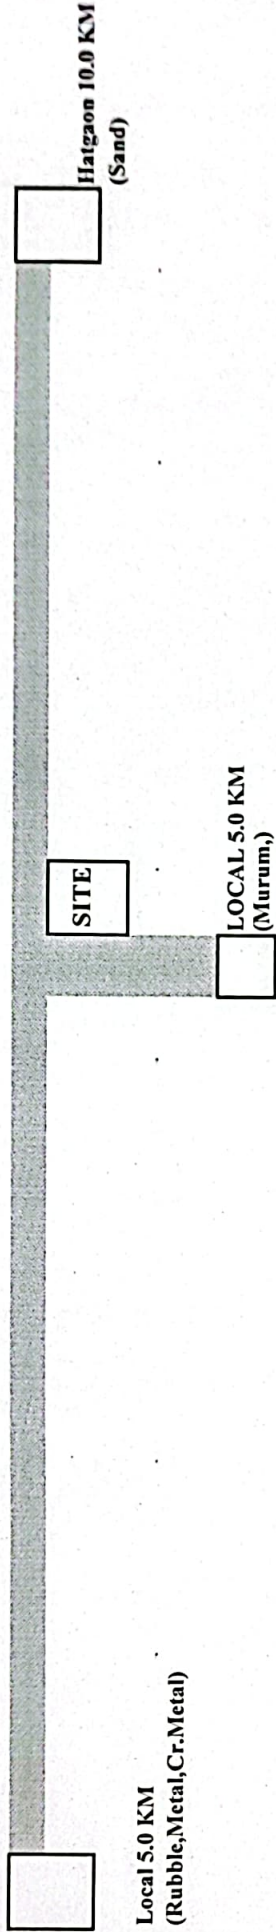

LEAD STATEMENT

Material	Quarry	Lead in Km.
Rubble	Local	5.00
Metal	Local	5.00
Crushed Metal	Local	5.00
Murum	Local	5.00
Sand	Hatgaon	10.00

CERTIFICATE.

- 1 Certified that the quarries shown on the quarry chart for metal & murum are inspected by me & they are nearest & economical to the work & contain sufficient & good quality material required for the work.
- 2 Certified that lead for quarries shown and accounted in the estimate is as per nearest route.
- 3 Certified that leads considered are found to be correct.

B. Shastri
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E. (Civil) A.M.I.E.
Chartered Engineer
AM3023322

B. Sathya
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarth Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. II - Internal Bituminous roads

ABSTRACT

Quantity	L.No	Item of work	Rate	unit	Amount
3240.00	1	Clearing grass and removal of rubbish up to a distance of 50 metres outside the periphery of the area .	4.00	Sqm	12960.00
182.26	2	Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing to proper grade and camber, applying and brooming requisite type of screening/ binding Materials to fill up the interstices of coarse aggregate, watering and compacting with Vibratory roller. to the required density. By Mechanical Means - Grading I (Using Screening Type A (13.2) mm Aggregate)	2639.70	Cum	481111.72
85.05	3	Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing to proper grade and camber, applying and brooming requisite type of screening/ binding Materials to fill up the interstices of coarse aggregate, watering and compacting with vibratory roller to the required density. By Mechanical Means - Grading II (Using Screening Type B (11.2 mm) Aggregate)	2593.81	Cum	220603.54
1012.50	4	Providing and constructing 75 mm. thick Modified Penetration Macadam (MPM) road surface including all materials, preparing the existing road surface, spreading 40 mm. stone metal layers 100% crusher broken metal with conical crusher plant heating and spraying the bitumen of specified grade @ 2 Kilogram/Square Metre, spreading 12 mm.size chips compacting with three wheel static roller having weight 8 to 10 MT. to achive the desired degree of compaction as per Technical Specification Clause 506 etc. complete. (VG-30 bulk bitumen)	361.68	Sqm	366201.00



Quantity	I.No	Item of work	Rate	unit	Amount
1012.50	5	Open Graded Premix Surfacing- Providing and Laying OGC 20 mm thickness composed of 13.2 mm to 5.6 mm aggregates premixed with bituminous binder @ 1.56 Kg/Sqm transported to site with VTS, laid over a previously prepared surface, finished to the required grade, level, alignment, and rolling to achieve the desired compaction but excluding prime / tack and Seal coat. For Bitumen of specified grade--USING drum mix type hot mix plant, Paver and Vibratory roller (Over MPM Surface) (VG-30 bulk Grade 60/70)	213.46	Sqm	216128.25
1012.50	6	9 MM SEAL COAT: Providing and laying of Type A 9 mm premix seal coat with HMP of Sqm appropriate capacity crushed stone chipping 6.7 mm size and penetration bitumen of specified grade @ 1.2 kg/Sq.m, preparing existing road surface by mechanical means, spreading chips and rolling, by static roller having weight 8 to 10 MT etc. complete. (VG-	132.38	Sqm	134034.75
405.00	7	Supplying hard murum/ kankar at the road site, including conveying and stacking complete.	850.22	Cum	344339.10
405.00	8	Spreading hard murum/ soft murrum/ gravel or kankar for side width complete	79.00	Cum	31995.00
2673.00	9	Compacting the hard murum side widths including laying in layers on each side with vibratory roller including artificial watering etc. complete.	21.00	Sqm	56133.00
				Total Rs.	1863506.36
			Part A)	Say Rs.	1863506.00
603.76	10	Royalty Charges	216.18	Cum	130521.38
1.00		Material Testing Charges	52110.00		52110.00
				Total Rs.	182631.38
			Part B)	Say Rs.	182631.00

Rajendra
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(Civil) A.M.I.E.
Chartered Engineer
AM3023322

Rahuri
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewartha Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. II - Internal Bituminous roads

I.No.

MEASUREMENT SHEET

- 1 Clearing grass and removal of rubbish up to a distance of 50 metres outside the periphery of the area .
- Road formation
New Road
- | | | | | | | | | | |
|------------------|---|---|--------|---|------|---|----------|----------------|------------|
| Long Side | 2 | x | 45.00 | x | 6.00 | = | 540.00 | Sqm | |
| Short Side | 2 | x | 90.00 | x | 6.00 | = | 1080.00 | | |
| Internal Road | 2 | x | 135.00 | x | 6.00 | = | 1620.00 | | |
| Total Qty | | | | | | | = | 3240.00 | Sqm |
- 2 Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing to proper grade and camber, applying and brooming requisite type of screening/ binding Materials to fill up the interstices of coarse aggregate, watering and compacting with Vibratory roller. to the required density. By Mechanical Means - Grading I (Using Screening Type A (13.2) mm Aggregate)
- | | | | | | | | | | | | |
|------------------|---|---|--------|---|------|---|------|---|----------|---------------|------------|
| Long Side | 1 | x | 45.00 | x | 4.50 | x | 0.15 | = | 30.38 | Cum | |
| Short Side | 1 | x | 90.00 | x | 4.50 | x | 0.15 | = | 60.75 | | |
| Internal Road | 1 | x | 135.00 | x | 4.50 | x | 0.15 | = | 91.13 | | |
| Total Qty | | | | | | | | | = | 182.26 | Cum |
- 3 Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing to proper grade and camber, applying and brooming requisite type of screening/ binding Materials to fill up the interstices of coarse aggregate, watering and compacting with vibratory roller to the required density. By Mechanical Means - Grading II (Using Screening Type B (11.2 mm) Aggregate)
- | | | | | | | | | | | | |
|------------------|---|---|--------|---|------|---|-------|---|----------|--------------|------------|
| Long Side | 1 | x | 45.00 | x | 4.20 | x | 0.075 | = | 14.18 | Cum | |
| Short Side | 1 | x | 90.00 | x | 4.20 | x | 0.075 | = | 28.35 | | |
| Internal Road | 1 | x | 135.00 | x | 4.20 | x | 0.075 | = | 42.53 | | |
| Total Qty | | | | | | | | | = | 85.05 | Cum |
- 4 Providing and constructing 75 mm. thick Modified Penetration Macadam (MPM) road surface including all materials, preparing the existing road surface, spreading 40 mm. stone metal layers 100% crusher broken metal with conical crusher plant heating and spraying the bitumen of specified grade @ 2 Kilogram/Square Metre, spreading 12 mm.size chips compacting with three wheel static roller having weight 8 to 10 MT. to achive the desired degree of compaction as per Technical Specification Clause 506 etc.
- | | | | | | | | | | |
|------------------|------|---|--------|---|------|---|----------|----------------|------------|
| Long Side | 1.00 | x | 45.00 | x | 3.75 | = | 168.75 | Sqm | |
| Short Side | 1.00 | x | 90.00 | x | 3.75 | = | 337.50 | | |
| Internal Road | 1.00 | x | 135.00 | x | 3.75 | = | 506.25 | | |
| Total Qty | | | | | | | = | 1012.50 | Sqm |
- 5 Open Graded Premix Surfacing- Providing and Laying OGC 20 mm thickness composed of 13.2 mm to 5.6 mm aggregates premixed with bituminous binder @ 1.56 Kg/Sqm transported to site with VTS, laid over a previously prepared surface, finished to the required grade, level, alignment, and rolling to achieve the desired compaction but excluding prime / tack and Seal coat. For Bitumen of specified grade--USING drum mix type hot mix plant, Paver and Vibratory roller (Over MPM Surface) (VG-30 bulk Grade 60/70)
- | | | | | | | | |
|------------------|------|---|---------|---|----------|----------------|------------|
| Road | 1.00 | x | 1012.50 | = | 1012.50 | Sqm | |
| Total Qty | | | | | = | 1012.50 | Sqm |



- 6 9 MM SEAL COAT: Providing and laying of Type A 9 mm premix seal coat with HMP of Sqm appropriate capacity crushed stone chipping 6.7 mm size and penetration bitumen of specified grade @ 1.2 kg/Sq.m, preparing existing road surface by mechanical means, spreading chips and rolling, by static roller having weight 8 to 10 MT etc. complete. (VG-
Qty same as per Item No. 5

= 1012.50 Sqm
Total Qty = 1012.50 Sqm

- 7 Supplying hard murum/ kankar at the road site, including conveying and stacking complete.

For Road Base	1.00	x	270.00	x	4.50	x	0.20	=	243.00		
For Blanketing	1.00	x	270.00	x	4.20	x	0.10	=	113.40	Cum	
Side Strips	2.00	x	270.00	x	0.60	x	0.15	=	48.60	Cum	
Total Qty									=	405.00	Cum

- 8 Spreading hard murum/ soft murrum/ gravel or kankar for side width complete

Qty same as per Item No. 7 Total Qty = 405.00 Cum

- 9 Compacting the hard murum side widths including laying in layers on each side with vibratory roller including artificial watering etc. complete.

For Road Base	1.00	x	270.00	x	4.50		=	1215.00	Sqm		
For Blanketing	1.00	x	270.00	x	4.20		=	1134.00			
Side Strips	2.00	x	270.00	x	0.60		=	324.00			
Total Qty									=	2673.00	Sqm

- 10 Royalty Charges

Material	Qty		Consumption				Qty of Material		
Grd I & Grd II	267.31	x	0.08				=	21.38	Cum
Murum	405.00	x	1.00				=	405.00	
MPM 40mm metal	1012.50	x	0.09				=	91.13	
Hm and Rubble Total Qty							=	517.51	Cum
							=	517.51	Cum

Gaurav Rajendra Bhaskar
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(Civil) A.M.I.E.
Chartered Engineer
AM3023322

Sai
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarth Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. II - Internal Bituminous roads

Rate Analysis for BT-Items

Item No.4:- Providing and constructing 75 mm. thick Modified Penetration Macadam (MPM) road surface including all materials, preparing the existing road surface, spreading 40 mm. stone metal layers 100% crusher broken metal with conical crusher plant heating and spraying the bitumen of specified grade @ 2 Kilogram/Square Metre, spreading 12 mm.size chips compacting with three wheel static roller having weight 8 to 10 MT. to achive the desired degree of compaction as per Technical Specification Clause 506 etc.

complete. (VG-30 bulk bitumen)

A) Basic Rate SSR 2022-23 Road Sub Base and Base Course I.No.3.35a					Rs	280.00	Per Sqm
<u>Add for asphalt</u>	46040	-	32877 =	13163	x	0.002	Rs 26.33 Per Sqm
<u>Diff.016/09/2022</u>							
B) Add.extra lead charges for							
A) 40 mm	0.09	70%		x		502.27	Rs. 31.64 Per Sqm
B)40 mm Crush metal	0.09	30%		x		393.44	Rs. 10.62 Per Sqm
C) Crush metal	0.018			x		410.55	Rs 7.39 Per Sqm
D) Bulk asphalt	0.002			x		2850.00	Rs 5.70 Per Sqm
Total Rate					Rs	361.68	Per Sqm

Item No.5:- Open Graded Premix Surfacing- Providing and Laying OGC 20 mm thickness composed of 13.2 mm to 5.6 mm aggregates premixed with bituminous binder @ 1.56 Kg/Sqm transported to site with VTS, laid over a previously prepared surface, finished to the required grade, level, alignment, and rolling to achieve the desired compaction but excluding prime / tack and Seal coat. For Bitumen of specified grade--USING drum mix type hot mix plant, Paver and Vibratory roller (Over MPM Surface) (VG-30 bulk Grade 60/70)

A) Basic Rate SSR 2022-23 Road Surfacing Course I.No.4.11						Rs	175.00	Per Sqm
<u>Add for asphalt</u>	46040	-	32877 =	13163	x	0.00171	Rs 22.51 Per Sqm	
<u>Diff.016/09/2022</u>								
B) Add.extra lead charges for								
Crush metal	0.027			x		410.55	Rs 11.08 Per Sqm	
Bulk asphalt. (1.46+0.25)	0.0017			x		2850.00	Rs 4.87 Per Sqm	
1000								
Total Rate					Rs	213.46	Per Sqm	

Item No.6:- 9 MM SEAL COAT: Providing and laying of Type A 9 mm premix seal coat with HMP of Sqm aproprate capacity crushed stone chiping 6.7 mm size and penetration bitumen of specified grade @ 1.2 kg/Sq.m, preparing existing road surface by mechanical means, spreading chips and rolling, by static roller having weight 8 to 10 MT etc. complete. (VG-

A) Basic Rate SSR 2022-23 Road Surfacing Course I.No.4.13						Rs	113.00	Per Sqm
<u>Add for asphalt</u>	46040	-	32877 =	13163	x	0.00098	Rs 12.90 Per Sqm	
<u>Diff.016/09/2022</u>								
B) Add.extra lead charges for								
Crush metal	0.009			x		410.55	Rs 3.69 Per Sqm	
Bulk asphalt. (0.98)	0.001			x		2850.00	Rs 2.79 Per Sqm	
1000								
Total Rate					Rs	132.38	Per Sqm	

Gaurav Rajendra Bhaskar
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(CIVIL) A.M.I.E.
Chartered Engineer
AM3023322

Rahuri
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarath Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. II - Internal Bituminous roads

RATE ANALYSIS AS PER PWD SSR 2022-23

Sr. No.	Description of Item	D.S.R. Page No. & It. No.	Basic Rate	Add extra lead charges for.....						Total Lead charges	Gross Rate
				Rubble/Cr. Metal	Sand	Cr. Metal	Murum	Cement/Steel			
1	Clearing grass and removal of rubbish up to a distance of	2.07	4.00	321.99	345.15	263.19	252.22	5.22	0.00	4.00	
2	Providing, laying, spreading and compacting stone	3.18	2230.00	1.21		0.27	20.1776		409.70	2639.70	
3	Providing, laying, spreading and compacting stone aggregate	3.20	2192.00	1.21		0.24	20.18		401.81	2593.81	
4	Providing and constructing 75 mm. thick Modified Per	3.35a	361.68						0.00	361.68	
5	Open Graded Premix Surfacing- Providing and Laying	4.12	213.46						0.00	213.46	
6	9 MM SEAL COAT: Providing and laying of Type A 9	4.01	132.38						0.00	132.38	
7	Supplying hard murum/ kankar at the road site, including	2.29a	598.00				1.00	252.22	252.22	850.22	
8	Spreading hard murum/ soft murum/ gravel or kankar	2.30	79.00						0.00	79.00	
9	Compacting the hard murum side widths including laying	2.31	21.00						0.00	21.00	
10	Royalty Charges		216.18						0.00	216.18	

Rajendra
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(Civil) A.M.I.E.
Chartered Engineer
AM3023322

Seetha
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarath Agro Producer Co.ltd.,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

S.W. II - Internal Bituminous roads

TESTING CHART

Item	Qty	Soil/HM	Bitumen	Metal	Agg.	Tests	Frequency	Total Test	At Site	At Lab	Rate	Amt
HM and E/W	405.00	405.00				Plasticity Index for Murum	1/400 Cum	0	0	1	1170.00	1170.00
Grd I&II	267.31	21.3848		323.4451		Combined Flakiness & Elongation of single metal	1/350 Cum	1	1	1	850.00	850.00
75 mm MPM	1012.50		2.08	42.53	33.41	Grardation	1/100 Cum	1	1	1	690.00	690.00
Total	1012.50		2.08	42.53	33.41	Combined Flakiness & Elongation of single metal	1/350 Cum	0	0	1	850.00	850.00
Carpet Sealcoat	1012.50		2.72		36.45	Binder Content	2/day	2	1	1	1595.00	1595.00
						B. M. Mix Design with all Tests on aggregate (Excluding bitumen) (Testing of Bitumen shall be seperately Charged)	1 Mix Design	3		3	7490.00	22470.00
Total			4.80	42.53	69.86	Penetration, Softening Point, Flash & Fire. Point, Specific Gravity	2/day	2	1	1	3135.00	3135.00
						Extraction Test. (Bituminous mix)	1 Test	5	3	2	1595.00	3190.00
						Job Mix Design with all Tests on aggregate (Excluding bitumen) for DBM/SDBC/AC/SMA (Stone Mastic Ashphalt)	1 Test	2	1	1	16250.00	16250.00
						Viscosity	2/day	2	1	1	1910.00	1910.00
											Total	52110.00

Rajendra Bhaskar
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E. (Civil) A.M.I.E.
Chartered Engineer
AM3023322

Rahuri
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar



Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Sewarth Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

Sub Work No:-III Electrification

ABSTRACT

Quantity	I.No	Item of work	Rate	unit	Amount
80.00	1	Supplying, erecting & terminating FR XLPE insulated, galvanised steel formed wire armoured (strip) cable 1100 V, 3 core 6 sq. mm. aluminium conductor complete erected with glands & lugs, on wall/ trusses/pole or laid in provided trench/ pipe as per specification no. CB-LT/AL 7-1-9	124.00	Running Meter	9920.00
40.00	2	Making trench in soft soil having 0.75 m depth and minimum 0.3 m width for laying provided cables up to voltage level of 1.1kV complete As per specification No. CW-EXN-CTR 16-1-1	156.00	Running Meter	6240.00
20.00	3	Making trench in Hard murum/Tar road having 0.75 m depth and minimum 0.3mtr width as per IS for laying provided cables up to voltage level 1.1Kv cable complete as per specification No. CW-EXN-CTR 7-2-5	193.00	Running Meter	3860.00
40.00	4	Supplying and erecting mains with 3x2.5 sq.mm FRLSH copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WG-MA/BW 5-12-1	79.00	Running Meter	3160.00
2.00	5	Supplying & erecting CRCA sheet metal enclosures of 1.2mm thickness with 10A, 2 pin plug & earth socket and 10A, 3 pin plug top with 10A single pole MCB having rated short - circuit breaking capacity (Icn) 10kA complete erected on angle iron / GI frame. 5-4-10	765.00	Number	1530.00
64.00	6	Point wiring for light/fan/bell in 20 mm FRLS grade HMS PVC conduit with 1.5 sq.mm (2+1E) FRLSH grade copper wire with flush type switch and required accessories as per specification No: WG-PW/SW 1-7-3	743.00	Number	47552.00
6.00	7	Supplying & erecting 10-12W, 230V integral type LED Lamp suitable for B-22 /E-27 base. 2-8-11	230.00	Number	1380.00
10.00	8	Supplying and erecting integrated LED street light fitting 18 to 22W IP65 & IK08 class having single piece pressure die-cast aluminium housing,having system lumens output of Min. 1800 Lumens, min. efficacy of 100 lumen/W, CRI>70, CCT upto 6500K, THD<10%, p.f. >0.95, operating range of 140- 270V, inbuilt surge protection of 10 kV, Life class of 50,000 Hrs. at L70B50, including driver complete with 3 Years warranty as per specification No FGODF/ FLS2. 2-4-1	1712.00	Number	17120.00



Quantity	I.No	Item of work	Rate	unit	Amount
10.00	9	Supplying and erecting Street light bracket made from 40 mm. dia 'B' class G.I. Pipe, 0.6m. in length along with pole cap of 300 mm length and 80 mm dia duly welded with provided leads as per specification no. FG-BKT/BPC 2-7-2	635.00	Number	6350.00
3.00	10	Providing earthing with galvanized iron earth plate size 60 x 60 x 0.6 cm complete with all materials, testing & recording the results as per specification no. EA-EP 9-1-1	4238.00	Number	12714.00
3.00	11	Providing pipe type earthing with 40mm. dia. G.I. pipe or 20 mm dia. G.I. Rod complete with all materials testing and recording the results as per specification no. EA-EP 9-1-4	1355.00	Number	4065.00
3.00	12	Supplying, erecting & marking DPMCB 6A to 32A, C-series with rated short -circuit breaking capacity (Icn) 10kA in provided distribution board as per specification no. SW-SWR/MCB 5-3-6	488.00	Number	1464.00
3.00	13	Supplying, erecting & marking SPMCB 6A to 32A, B-series with rated short - circuit breaking capacity (Icn) 10kA in provided distribution board as per specification no. SW-SWR/MCB 5-3-3	164.00	Number	492.00
2.00	14	Supplying and erecting GI sheet 1.6 mm (16 SWG) having zinc coating of 350 microns with galvanization process compliance to IS 2629:1985 to be used for fabrication of boxes panel boards etc. including cutting, bending, drilling, welding, riveting etc. and painting with one coat of red lead paint and 2 coats of enamel paint. 6-1-6	2264.00	Square Metre	4528.00
2.00	15	Supplying and erecting marine (Waterproof) plywood 18/19 mm thick fixed to wall or on provided panel board with necessary materials such as screws, wall fasteners, supports, nut bolts etc. complete with compliance to IS 720:2010 6-1-14	1342.00	Square Metre	2684.00
2.00	16	Supplying & erecting triple pole and neutral distribution board (TPNDB), 3 pole/ 4 pole MCCB as incomer & outgoing SP MCB (12 poles) or TP MCB of 4 ways (12 poles), with door, 1.2mm thickness, surface/flush mounted, on iron/GI frame (vertical busbar type) as per specification no.SW-SWR/MCBDB1 5-4-15	4057.00	Number	8114.00
8.00	17	Supplying & erecting G.I. pipe 'A' class 25 mm dia. erected for enclosing XLPE armoured cable on wall/pole as per specification no. CB-CE 7-6-1	196.00	Running Meter	1568.00



Quantity	I.No	Item of work	Rate	unit	Amount
12.00	18	Supplying & erecting G.I. pipe 'A' class 40 mm dia. erected for enclosing XLPE armoured cable on wall/pole as per specification no. CB-CE 7-6-2	304.00	Running Meter	3648.00
10.00	19	Supplying and laying (including excavation of suitable width & depth up to 90 cm) 75 mm outside dia. double wall corrugated pipes (DWC) of HDPE for enclosing cable below ground/road surface, to required depth complete. 7-6-10	227.00	Running Meter	2270.00
2.00	20	Supplying & erecting 18 gauge M.S. Box powder coated (4"x4") 3 way for mains connection. MR	500.00	Number	1000.00
8.00	21	Supplying & erecting single compression type brass cable glands for 3 to 4 core 6 sq mm / 2 to 4 core 10 sq mm for XLPE armoured cable as per specification No.CB-GL 7-7-2	58.00	Number	464.00
12.00	22	Supplying and erecting Ceiling rose / Batten holder / Slanting holder / hanging cord switch / hanging bell push / pendant holder bakelite base 6A. erected on filled polypropylene board or polished double wooden block/ PVC junction box. 1-5-7	35.00	Number	420.00
8.00	23	Point wiring for independent plug in 20 mm metal conduit with 1.5 sq.mm (2+1E) FRLSH grade copper wire, flush type switch, earthing and required accessories as per specification No: WG-PW/SW 1-7-2	814.00	Number	6512.00
8.00	24	Wiring for plug on board with Switch socket surface/concealed type, copper wiring and earthing and with modular accessories as per specification No: WGPW/CW 1-7-26	481.00	Number	3848.00
40.00	25	Supplying and erecting mains with 2x2.5 sq.mm FRLSH copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW 1-3-2	57.00	Running Meter	2280.00
30.00	26	Supplying and erecting mains with 2x4 sq.mm FRLSH copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW 1-3-3	78.00	Running Meter	2340.00
2.00	27	Supplying and erecting modular type D.P. switch 32A with indicator, duly erected on provided plate and box with wiring connections complete. 1-6-8	183.00	Number	366.00



Quantity	I.No	Item of work	Rate	unit	Amount
2.00	28	Supplying, erecting and marking double pole isolator only switch version of miniature circuit breaker of 40A with required wiring connections and lugs etc.in provided distribution board. 5-3-14	293.00	Number	586.00
6.00	29	Supplying & erecting 3W, 230V integral type LED Lamp suitable for B-22 / E- 27 base. 2-8-9	125.00	Number	750.00
8.00	30	Supplying and erecting IP65 and IK08 rated UV shielded polycarbonate waterproof and dustproof industrial grade LED fitting (4 feet) max. 36W with high transitivity diffuser with system lumens output of min. 4300 lumens , min. efficacy of 120 lumen/W, CRI>80, CCT upto 6500K, Beam Angle of 120 deg., Ripple<5%, THD<10%, p.f. >0.95, operating range of 120-270V, surge protection of 4 kV, Life class of 50,000 Hrs. at L70B50 , IP20 rated, including driver with auto cutoff & auto restart feature at 325V with end caps on PVC lock/wooden board with 3 years warranty. 2-2-1	2751.00	Number	22008.00
2.00	31	Supplying and erecting regular/ standard model ceiling fan of 900 /1050 mm. sweep complete erected in position as per specification no. FG-FN/CF 2-10-2	1894.00	Square Meter	3788.00
2.00	32	Supplying and erecting ding dong / electronic musical type call bell with heavy duty coil suitable to operate on 230V A.C. supply erected on olished double wooden block/sunmica block of suitable size. 2-3-13	131.00	Number	262.00
8.00	33	Supplying and erecting Street light bracket made from 25 mm. dia 'B' class G.I. Pipe, 0.6m. in length along with pole cap of 300 mm length and 80 mm dia duly welded with provided leads as per specification no. FG-BKT/BPC 2-7-1	567.00	Number	4536.00
2.00	34	Supplying & erecting CRCA sheet metal one way enclosures of 1.2mm thickness suitable for DP MCB /TP MCB/FP MCB/RCCB/RCBO complete erected on angle iron/GI frame. 5-4-13	361.00	Number	722.00
2.00	35	Supplying, erecting and marking four pole isolators only switch version of miniature circuit breakers of 40A in provided distribution board. 5-3-18	625.00	Number	1250.00
				Total Rs.	189791.00
			Part A)	Say Rs.	189791.00



Rajendra
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(Civil) **A.M.I.E**
Chartered Engineer
AM3023322

Bohra
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar

Name Of Work :- Proposed Construction of 1800MT Warehouse Unit Building In G.no.21 Paiki, For Searth Agro Producer Co.ltd,At-Anbhora, Tal-Murtijapur,Dist: Akola (MH)

Sub Work No:-III Electrification

MEASUREMENT SHEET

Item. No.	Description of Items	NO.		<u>LENTH</u>	<u>BREATH</u>	<u>DEPTH</u>		<u>TOTAL</u>	<u>UNIT</u>	
1	Supplying, erecting & terminating FR XLPE insulated, galvanised steel formed wire armoured (strip) cable 1100 V, 3 core 6 sq. mm. aluminium conductor complete erected with glands & lugs, on wall/ trusses/pole or laid in provided trench/ pipe as per specification no. CB-LT/AL 7-1-9								Running Meter	
	Ware House	1	x	1	x	80.00	x	1	=	80.00
								Total		80.00
								Say		80.00
2	Making trench in soft soil having 0.75 m depth and minimum 0.3 m width for laying provided cables up to voltage level of 1.1kV complete As per specification No. CW-EXN-CTR 16-1-1								Running Meter	
	Ware House	1	x	1	x	40.00	x	1	=	40.00
								Total		40.00
								Say		40.00
3	Making trench in Hard murum/Tar road having 0.75 m depth and minimum 0.3mtr width as per IS for laying provided cables up to voltage level 1.1Kv cable complete as per specification No. CW-EXN-CTR 7-2-5								Number	
	Ware House	1	x	1	x	20.00	x	1	=	20.00
								Total		20.00
								Say		20.00
4	Supplying and erecting mains with 3x2.5 sq.mm FRLSH copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WG-MA/BW 5-12-1								Running Meter	
	Ware House	1	x	1	x	40.00	x	1	=	40.00
								Total		40.00
								Say		40.00
5	Supplying & erecting CRCA sheet metal enclosures of 1.2mm thickness with 10A, 2 pin plug & earth socket and 10A, 3 pin plug top with 10A single pole MCB having rated short - circuit breaking capacity (Icn) 10kA complete erected on angle iron / GI frame. 5-4-10								Number	
	Ware House	2	x	1	x	1.00	x	1	=	2.00
								Total		2.00
								Say		2.00
6	Point wiring for light/fan/bell in 20 mm FRLS grade HMS PVC conduit with 1.5 sq.mm (2+1E) FRLSH grade copper wire with flush type switch and required accessories as per specification No: WG-PW/SW 1-7-3								Number	
	Ware House	2	x	32	x	1.00	x	1	=	64.00
								Total		64.00
								Say		64.00
7	Supplying & erecting 10-12W, 230V integral type LED Lamp suitable for B-22 /E-27 base. 2-8-11								Number	
	Ware House	3	x	2	x	1.00	x	1	=	6.00



Total 6.00
Say 6.00

- 8 Supplying and erecting integrated LED street light fitting 18 to 22W IP65 & IK08 class having single piece pressure die-cast aluminium housing, having system lumens output of Min. 1800 Lumens, min. efficacy of 100 lumen/W, CRI>70, CCT upto 6500K, THD<10%, p.f. >0.95, operating range of 140-270V, inbuilt surge protection of 10 kV, Life class of 50,000 Hrs. at L70B50, including driver complete with 3 Years warranty as per specification No FGODF/ FLS2. 2-4-1 Number
- Ware House 1 x 10 x 1.00 x 1 x 1 = 10.00
Total 10.00
Say 10.00
- 9 Supplying and erecting Street light bracket made from 40 mm. dia 'B' class G.I. Pipe, 0.6m. in length along with pole cap of 300 mm length and 80 mm dia duly welded with provided leads as per specification no. FG-BKT/BPC 2-7-2 Number
- Ware House 1 x 10 x 1.00 x 1 x 1 = 10.00
Total 10.00
Say 10.00
- 10 Providing earthing with galvanized iron earth plate size 60 x 60 x 0.6 cm complete with all materials, testing & recording the results as per specification no. EA-EP 9-1-1 Number
- Ware House 1 x 3 x 1.00 x 1 x 1 = 3.00
Total 3.00
Say 3.00
- 11 Providing pipe type earthing with 40mm. dia. G.I. pipe or 20 mm dia. G.I. Rod complete with all materials testing and recording the results as per specification no. EA-EP 9-1-4 Number
- Ware House 1 x 3 x 1.00 x 1 x 1 = 3.00
Total 3.00
Say 3.00
- 12 Supplying, erecting & marking DPMCB 6A to 32A, C-series with rated short -circuit breaking capacity (Icn) 10kA in provided distribution board as per specification no. SW-SWR/MCB 5-3-6 Number
- Ware House 1 x 3 x 1.00 x 1 x 1 = 3.00
Total 3.00
Say 3.00
- 13 Supplying, erecting & marking SPMCB 6A to 32A, B-series with rated short - circuit breaking capacity (Icn) 10kA in provided distribution board as per specification no. SW-SWR/MCB 5-3-3 Number
- Ware House 1 x 3 x 1.00 x 1 x 1 = 3.00
Total 3.00
Say 3.00
- 14 Supplying and erecting GI sheet 1.6 mm (16 SWG) having zinc coating of 350 microns with galvanization process compliance to IS 2629:1985 to be used for fabrication of boxes panel boards etc. including cutting, bending, drilling, welding, riveting etc. and painting with one coat of red lead paint and 2 coats of enamel paint. 6-1-6 Square
Metre
- Ware House 1 x 2 x 1.00 x 1 x 1 = 2.00
Total 2.00



Say 2.00

- 15 Supplying and erecting marine (Waterproof) plywood 18/19 mm thick fixed to wall or on provided panel board with necessary materials such as screws, wall fasteners, supports, nut bolts etc. complete with Ware House
- | | | | | | | | | | | | |
|--|---|---|---|---|------|---|---|---|--------------|---|------|
| | 1 | x | 2 | x | 1.00 | x | 1 | x | 1 | = | 2.00 |
| | | | | | | | | | Total | | 2.00 |
| | | | | | | | | | Say | | 2.00 |
- 16 Supplying & erecting triple pole and neutral distribution board (TPNDB), 3 pole/ 4 pole MCCB as incomer & outgoing SP MCB (12 poles) or TP MCB of 4 ways (12 poles), with door, 1.2mm thickness, surface/flush mounted, on iron/GI frame (vertical busbar type) as per specification no.SW-SWR/MCBDB1 5-4-15 Ware House
- | | | | | | | | | | | | |
|--|---|---|---|---|------|---|---|---|--------------|---|------|
| | 1 | x | 2 | x | 1.00 | x | 1 | x | 1 | = | 2.00 |
| | | | | | | | | | Total | | 2.00 |
| | | | | | | | | | Say | | 2.00 |
- 17 Supplying & erecting G.I. pipe 'A' class 25 mm dia. erected for enclosing XLPE armoured cable on wall/pole as per specification no. CB-CE 7-6-1 Ware House
- | | | | | | | | | | | | |
|--|---|---|---|---|------|---|---|---|--------------|---|------|
| | 8 | x | 1 | x | 1.00 | x | 1 | x | 1 | = | 8.00 |
| | | | | | | | | | Total | | 8.00 |
| | | | | | | | | | Say | | 8.00 |
- 18 Supplying & erecting G.I. pipe 'A' class 40 mm dia. erected for enclosing XLPE armoured cable on wall/pole as per specification no. CB-CE 7-6-2 Ware House
- | | | | | | | | | | | | |
|--|---|---|---|---|------|---|---|---|--------------|---|-------|
| | 2 | x | 1 | x | 6.00 | x | 1 | x | 1 | = | 12.00 |
| | | | | | | | | | Total | | 12.00 |
| | | | | | | | | | Say | | 12.00 |
- 19 Supplying and laying (including excavation of suitable width & depth up to 90 cm) 75 mm outside dia. double wall corrugated pipes (DWC) of HDPE for enclosing cable below ground/road surface, to required depth complete. 7-6-10 Ware House
- | | | | | | | | | | | | |
|--|---|---|---|---|-------|---|---|---|--------------|---|-------|
| | 1 | x | 1 | x | 10.00 | x | 1 | x | 1 | = | 10.00 |
| | | | | | | | | | Total | | 10.00 |
| | | | | | | | | | Say | | 10.00 |
- 20 Supplying & erecting 18guage M.S. Box powder coated (4"x4") 3 way for mains connection. MR Ware House
- | | | | | | | | | | | | |
|--|---|---|---|---|------|---|---|---|--------------|---|------|
| | 1 | x | 2 | x | 1.00 | x | 1 | x | 1 | = | 2.00 |
| | | | | | | | | | Total | | 2.00 |
| | | | | | | | | | Say | | 2.00 |
- 21 Supplying & erecting single compression type brass cable glands for 3 to 4 core 6 sq mm /2 to 4 core 10 sq mm for XLPE armoured cable as per specification No.CB-GL 7-7-2 Ware House
- | | | | | | | | | | | | |
|--|---|---|---|---|------|---|---|---|--------------|---|------|
| | 1 | x | 8 | x | 1.00 | x | 1 | x | 1 | = | 8.00 |
| | | | | | | | | | Total | | 8.00 |
| | | | | | | | | | Say | | 8.00 |

Number



- 22 Supplying and erecting Ceiling rose / Batten holder / Slanting holder / hanging cord switch / hanging bell push / pendant holder bakelite base 6A. erected on filled polypropylene board or polished double wooden block/ PVC junction box. 1-5-7 Number
- | | | | | | | | | | | | |
|------------|---|---|----|---|------|---|---|---|---|--------------|-------|
| Ware House | 1 | x | 12 | x | 1.00 | x | 1 | x | 1 | = | 12.00 |
| | | | | | | | | | | Total | 12.00 |
| | | | | | | | | | | Say | 12.00 |
- 23 Point wiring for independent plug in 20 mm metal conduit with 1.5 sq.mm (2+1E) FRLSH grade copper wire, flush type switch, earthing and required accessories as per specification No: WG-PW/SW 1-7-2 Number
- | | | | | | | | | | | | |
|------------|---|---|---|---|------|---|---|---|---|--------------|------|
| Ware House | 1 | x | 8 | x | 1.00 | x | 1 | x | 1 | = | 8.00 |
| | | | | | | | | | | Total | 8.00 |
| | | | | | | | | | | Say | 8.00 |
- 24 Wiring for plug on board with Switch socket surface/concealed type, copper wiring and earthing and with modular accessories as per specification No: WGPW/ CW 1-7-26 Number
- | | | | | | | | | | | | |
|------------|---|---|---|---|------|---|---|---|---|--------------|------|
| Ware House | 1 | x | 8 | x | 1.00 | x | 1 | x | 1 | = | 8.00 |
| | | | | | | | | | | Total | 8.00 |
| | | | | | | | | | | Say | 8.00 |
- 25 Supplying and erecting mains with 2x2.5 sq.mm FRLSH copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW 1-3-2 Running Meter
- | | | | | | | | | | | | |
|------------|---|---|----|---|------|---|---|---|---|--------------|-------|
| Ware House | 1 | x | 40 | x | 1.00 | x | 1 | x | 1 | = | 40.00 |
| | | | | | | | | | | Total | 40.00 |
| | | | | | | | | | | Say | 40.00 |
- 26 Supplying and erecting mains with 2x4 sq.mm FRLSH copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW 1-3-3 Running Meter
- | | | | | | | | | | | | |
|------------|---|---|----|---|------|---|---|---|---|--------------|-------|
| Ware House | 1 | x | 30 | x | 1.00 | x | 1 | x | 1 | = | 30.00 |
| | | | | | | | | | | Total | 30.00 |
| | | | | | | | | | | Say | 30.00 |
- 27 Supplying and erecting modular type D.P. switch 32A with indicator, duly erected on provided plate and box with wiring connections complete. 1-6-8 Number
- | | | | | | | | | | | | |
|------------|---|---|---|---|------|---|---|---|---|--------------|------|
| Ware House | 1 | x | 2 | x | 1.00 | x | 1 | x | 1 | = | 2.00 |
| | | | | | | | | | | Total | 2.00 |
| | | | | | | | | | | Say | 2.00 |
- 28 Supplying, erecting and marking double pole isolator only switch version of miniature circuit breaker of 40A with required wiring connections and lugs etc.in provided distribution board. 5-3-14 Number
- | | | | | | | | | | | | |
|------------|---|---|---|---|------|---|---|---|---|--------------|------|
| Ware House | 1 | x | 2 | x | 1.00 | x | 1 | x | 1 | = | 2.00 |
| | | | | | | | | | | Total | 2.00 |
| | | | | | | | | | | Say | 2.00 |
- 29 Supplying & erecting 3W, 230V integral type LED Lamp suitable for B-22 / E- 27 base. 2-8-9 Number
- | | | | | | | | | | | | |
|------------|---|---|---|---|------|---|---|---|---|--------------|------|
| Ware House | 1 | x | 6 | x | 1.00 | x | 1 | x | 1 | = | 6.00 |
| | | | | | | | | | | Total | 6.00 |



Say 6.00

- 30 Supplying and erecting IP65 and IK08 rated UV shielded polycarbonate waterproof and dustproof industrial grade LED fitting (4 feet) max. 36W with high transitivity diffuser with system lumens output of min. 4300 lumens, min. efficacy of 120 lumen/W, CRI>80, CCT upto 6500K, Beam Angle of 120 deg., Ripple<5%, THD<10%, p.f. >0.95, operating range of 120-270V, surge protection of 4 kV, Life class of 50,000 Hrs. at L70B50, IP20 rated, including driver with auto cutoff & auto restart feature at 325V with end caps on PVC lock/wooden board with 3 years warranty. 2-2-1

Ware House	1	x	8	x	1.00	x	1	x	1	=	8.00
									Total		8.00
									Say		8.00

Number

- 31 Supplying and erecting regular/ standard model ceiling fan of 900 /1050 mm. sweep complete erected in position as per specification no. FG-FN/CF 2-10-2

Ware House	1	x	2	x	1.00	x	1	x	1	=	2.00
									Total		2.00
									Say		2.00

Number

- 32 Supplying and erecting ding dong / electronic musical type call bell with heavy duty coil suitable to operate on 230V A.C. supply erected on olished double wooden block/sunmica block of suitable size. 2-3-13

Ware House	1	x	2	x	1.00	x	1	x	1	=	2.00
									Total		2.00
									Say		2.00

Square Meter

- 33 Supplying and erecting Street light bracket made from 25 mm. dia 'B' class G.I. Pipe, 0.6m. in length along with pole cap of 300 mm length and 80 mm dia duly welded with provided leads as per specification no. FG-BKT/BPC 2-7-1

Ware House	1	x	8	x	1.00	x	1	x	1	=	8.00
									Total		8.00
									Say		8.00

Number

- 34 Supplying & erecting CRCA sheet metal one way enclosures of 1.2mm thickness suitable for DP MCB /TP MCB/FP MCB/RCCB/RCBO complete erected on angle iron/GI frame. 5-4-13

Ware House	1	x	2	x	1.00	x	1	x	1	=	2.00
									Total		2.00
									Say		2.00

Number

- 35 Supplying, erecting and marking four pole isolators only switch version of miniature circuit breakers of 40A in provided distribution board. 5-3-18

Ware House	1	x	2	x	1.00	x	1	x	1	=	2.00
									Total		2.00
									Say		2.00

Number

Rajendra
Chartered Engineer
Gaurav Rajendra Bhaskar
B.E.(Civil) A.M.I.E.
Chartered Engineer
AM3023322

Rahuri
Consulting Engineer
SAI CONSULTANT
Consulting Civil Engineer
Rahuri, Dist. Ahmednagar

