

BPL ENGINEERS

Manufacturers of All Types of Electronics Weighing Scales

W-257, S Block, Near Indrayani Nagar, MIDC Bhosari, Pune-411026

30-06-2022

QUOTATION

TO,
M/s. Dattprayag Agro Producer Company Limited
At - Tsl & , Dist-Parbhani, Maharashtra

Sub :- Quotation For BPL Make Fully Electronics Weigh Bridge
With reference to your enquiry for an " BPL " Make Electronic Weigh Bridge
We take pleasure to quote for the same :-

Type:- Pitless or Pit Type

"BPL" Make Fully Electronics Weigh Bridge

Capacity	Least Count	Platform Size	Qty
1) 50 / 60 Tons Using 6 Loadcells of 30 Tons Each	5 Kg / 10 kg	3 M * 9 M	1 no

Specifications :-

Structure:-Weighbridge Bottom Deck should be fabricated of suitable heavy steel
Sections made of M.S. plate 10 mm thick on top with anti skid strips.

Load cells & Accessories:-

- The Load cells used are of Double Ended Shear Beam & are certified with IP-68 quality standards.
- Mounting kits for Load cells & foundation pedestals.
to safeguarded against lateral & sway moments.

Indicator Headwork :-

- A Complete Software loaded I.T Digitiser with All the necessary data feeding facility such as Truck No, Material details, Party Name etc via its 101 keys Keyboard
- 1 no Jumbo Display
- Software will have a facility to generate various reports such as monthly Report, Truck wise, Item Wise, & Party Wise Reports



Contd...2

[Signature]
अध्यक्ष

दत्तप्रयाग अग्रो प्रोड्यूसर कंपनी लि
पारभणी ता. जि. परभणी

[Signature]
सचिव

[Signature]
मुख्य कार्यालयी अधिकारी

119



Technical Offer

1	Loadcell	
	Make and Model number	" ADI " Make ,
	Type	Double Ended Shear Beam Type
	Design Capacity of each load cell, tons	Nearby to 30 Ton each
	Allowable over-load on each load cell, % of design load	
	- Safe	150 % of RO
	- Impact or Ultimate	300 % of RO
	Rated Output Sensitivity	3mV/V +/- 0.002
	Protection provided for dust, water, etc.	IP 68 (Hermetically Sealed)
	Input Resistance	750 +/- 10 Ohms
	Output resistance	750 +/- 3 Ohms
	Insulation Resistance	5000 Ohms Max. at 50VDC
	Non- Repeatability	+/- 0.01
	Non-linearity, % RO	+/- 0.01
	Hysteresis, % RO	+/- 0.02
	Creep 30 Min. % RO	+/- 0.02
	Zero balance % RO	+/- 1
	Recommended Voltage	5-15V AC/DC
	Maximum Excitation Voltage	20 V AC/DC
	Temperature compensation range, deg Celsius = +/-	0 to 60 deg Celsius
	Operating Temperature Limits, deg Celsius = +/-	0 to 50 deg Celsius

Unique features of these Sentionics / ADI load cells are:

- ▶ High Accuracy. Easy Installation
- ▶ Does not require mechanical constrains to restore to its original position & take impact of side loads/ breaking jerks

Scope of supply:**Purchasers Scope:**

- ▶ Entire Civil foundation work as per the BPL Engineers Drawings & weigh cabin.
- ▶ Necessary Permits and Entry passes
- ▶ Earth Pit and Earth strip routing to and over foundation pedestals as per diagram.
- ▶ Test weights for Calibration.
- ▶ Required Printing Material , & Inverter (If needed)
- ▶ Loading and unloading for hydra crane for installation.
- ▶ TVSE Printer-Dot matrix



Opali
Shobha

Contd...3



BPL Engineers scope of Supply

1	Structure / Platform Assembly
2	A0024 Digitizer with jumbo display for driver.
3	ADI make Load cells of 30T capacity each for Weigh bridge
4	Junction Box - 1 No.
5	Standard 20m Home run Cable.
6	Standard Weighbridge software.

Commercial Offer :

Sr. No.	Particulars	Unit	Qty	Price (In Rs.) Each	GST@ 18% Extra
1.	Basic Price of 50 / 60 Ton Weigh Bridge Model : TBPL Type : Pitless or Pit Type Platform Size : 9 mtrs x 3 mtrs No. of Load cells : (6)	Set	1 no	Rs.6,00,000.00	Rs1,08,000.00

Total Price :- Rs 7,08,000.00

FREIGHT : Included

STAMPING : BPL Engineers will stamp the Weighbridge at site.

WARRANTY : BPL Engineers offers a warranty of one year from the date of invoiced. The warranty offered is an on-site warranty and is applicable only to the original buyer to whom the weighbridge is invoiced.

DELIVERY : 3 - 4 Weeks.

PAYMENT TERMS : 50% Advance with PO
45% plus full taxes against Proforma Invoice before delivery
5% against Installation or with in 15 days of material recpt.
Whichever is earlier

VALIDITY OF THE OFFER : 10 days from the date of the company's offer.

Note:-As per department of weights & metrology guideline, customer has to keep 1 ton test weights is mandatory along with weighbridge.

With Best Regards

For BPL Engineers

Manoj

Mobile- 8830089132





GDAGROINDUSTRIES.COM

G.D. AGRO INDUSTRIES

Opposite Axiom, Sersheri, Rampur-Sersheri
Road, Ambala Cantt. 133001 (Haryana) INDIA
Mob: 9466129702, 9812828777, 9996539999
E-mail: g.d.sheet2008@gmail.com, gdagro08@gmail.com

• ISO 9001: 2015 • ISO 14001: 2015 • OHSAS 18001: 2007 & CE CERTIFIED CO.

REF. NO. GD/0135/07/2022-23
DATED-01/07/2022

DATTPRAYAG AGRO PRODUCER COMPANY LIMITED

Parbhani

Tq Dist -Parbhani 431401

Email: dattprayagagro@gmail.com

Mob No: +91 90978-85555

SUBJECT: - OFFER FOR SUPPLY OF SEED PROCESSING PLANT, CAPACITY 3-4TPH WITH 12% MOISTURE & 10% IMPURITIES BASED ON WHEAT ON INPUT BASIS

SEED PLANT CONTAINS FOLLOWING MACHINES

NOTE: ALL SHEET METAL COMPONENT SHALL BE MANUFACTURED ON LASER CUTTING MACHINE BY US.

S.NO.	PARTICULARS	QTY	RATE	AMOUNT
1.	Vertical Bucket Elevator	3	100000.00	300000.00
	Capacity	3 TPH		
	Discharge Height	Suitable		
	Discharge Pipe	Suitable diameter & 2mm MS pipe		
	Nylon Bucket Size	4" X 4"		
	Head Section	2 mm		
	Middle Section	1.6 mm DOUBLE		
	Bottom Boot Assembly	3.00 mm thick, self-cleaning type		
	Geared Motor	1. HP, 440 volt, 3ph, 50Hz, AC supply		
	Belt & Belt speed	4 ply Nylon & speed not exceed 1 m/s		
	Spout Section And spouting	Suitable to fitting		
	Accessories	Safety Casing Platform with safety casing		
2.	Seed Grader/Fine Cleaner Alphard 3K	1	325000.00	325000.00
	Model	Model		
	Capacity	3 TPH Based on Wheat with 12%moisture &10 % Impurities on Input basis.		
	No. of Layers	3		
	No. of screen	3		
	Size of top screen	90x100CM (W x L)		
	Bottom Screen	90x182CM(W x L)		
	Totally screening area	4.17sq mtr		
	Screen inclination	Fixed		
	No. of scalping	1 No		



Dipali
अधिकारी

Shobher
सचिव

Harsh
प्रमुख कार्यकारी अधिकारी

दत्तप्रयाग ऑफिस चोकरावा जं. १०



No. of grading	2 No			
No. of air aspiration	2 No			
Electric motor	3+1.5 HP, 440 volt, 3ph, 50hz, Ac supply			
1 screen set, 2 Air trunk & 1 elbow	Included in machine			
Over all dimension	291x129x249CMS(LXWXH)			
3.	Seed Gravity Separator	1	325000.00	325000.00
Numbers of blower	5 FAN			
Blower fan	Dynamically balance			
Size of Deck	234x105cm			
Deck area	2.45sqm			
Oscillation speed of deck	Variable			
Deck Inclination	Variable			
Feed system	Bucket elevator			
Deck speed control	Manual			
Electric Motor (Deck)	9.5 hp , 440 volt, 3ph, 50Hz, AC supply			
Over all dimension	280X165x180CMS(LXWXH)			
4.	Magnetic destonner (1200mm)	1	365000.00	365000.00
1 Nos. Magnetic Rolls size 100 mm Dia. x 1200 mm Length Magnetic Material used: High Intensity Rare Earth Nd-FeB Gr. N-52. having Gauss value of 12,000 to 13,000. Power Variation 10% With 0.7 mm P.U. Make belt -- 1 Nos.				
With 1 Nos. 6" x 6" Drawer Magnet with 2 Nos. Of 27 mm Dia. Magnetic Rod Having Gauss Value of 5,000.(Fitted On Hopper)				
With 1 Nos. 1 HP, Three Phase Electric Motor with reduction gear box Gear Size: 63 Center, Ratio 30:1.				
Machine structure housing made from MS pipe and Channel -- pipe size 50 x 50 x 3 mm and Channel size 75 mm x 38 mm. Thickness of Side Covers -- 18 Gauge.				
With 1 No. vibrating feeder with 0.5 HP, Three Phase, 440 V, 50HZ Vibrating Motor.				
With 1 Nos. M. S. Supported Roller size 100 mm dia. x 1200 mm length.				
Machine completely closed design to avoid dusting and air pollution.				
5.	STORAGE BIN (2 TONPERHOUR)	1	85000.00	85000.00
6.	SET OF SIEVES	5	24000.00	120000.00
7.	GRAVITY DECK	2	45000.00	90000.00
SUB-TOTAL				16,10,000
Freight				90,000
Installation				2,00,000
Total				19,00,000
GST@18%				3,42,000
GRAND-TOTAL				22,42,000



Shabhy

Shabhy

Shabhy

जोब शाजा, परभणी
जाम्बूर, पारभणी
फोर्टगेट, अल्लाहाबाद


शुद्ध कागज की प्रतिकृति

AND CONDITIONS:-

1. PRICES: OUR PRICES ARE AT EX-WORKS, AMBALA CANTT.
 2. FREIGHT IS INCLUDED IN THIS QUOTATION.
 3. GST 18% .
 4. DELIVERY: THE EQUIPMENT SHALL BE DESPATCHED WITH IN 45 DAYS FROM AMBALA CANTT AFTER RECEIPT OF YOUR TECHNICALLY AND COMMERCIALY CONFIRMED ORDER.
 5. WARRENTY : OUR PRODUCT HAVING 1 YEAR (365 DAYS) FROM THE DATE OF DESPATCH AGAINST ANY MANUFACTURING DEFECT OR BAD WORKMANSHIP.
 6. PAYMENT. OUR PAYMENT TERMS ARE 70% PAYMENT ADVANCE ALONGWITH YOUR PURCHASE ORDER & 30% PAYMENT BEFORE DELIVERY.
 7. ALL TYPE OF WIRES & CIVILWORKS IS TO BE PROVIDED BY THE CUSTOMER.
 8. UNLOADING OF PLANT IS ARRANGED BY THE BUYER AT ITS OWN RISKS & COSTS
- PLEASE SEND US THE PURCHASE ORDER FOR INTIALIZATION OF YOUR ORDER.

FOR GD AGRO INDUSTRIES:-

For G.D. AGRO INDUSTRIES



Authorised Signatory


AUTHORISED SIGNATURE

SOLAR




अध्यक्ष

दादाप्रयाग अॅग्रो प्रोड्यूसर कंपनी लि



सचिव



मनव्य कार्याकारी अधिकारी



(11/07/2022)

10 KW Three-Phase Solar Grid Connected Proposal

Proposal Submitted To:
DATTAPRAYAG AGRO PRODUCER COMPANY

LIVFAST SOLAR



Dipali
अध्यक्ष



दत्ताप्रयाग अग्रो प्रोड्यूसर कंपनी लि
परभणी ता. जि. परभणी

Shobha
सचिव

Shubham
मुख्य कार्यकारी अधिकारी



LIV FAST SOLAR

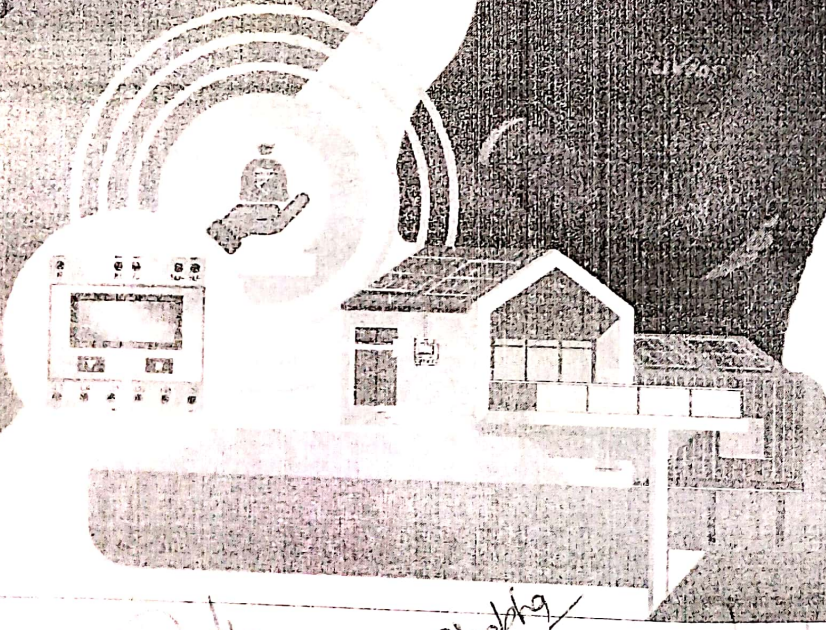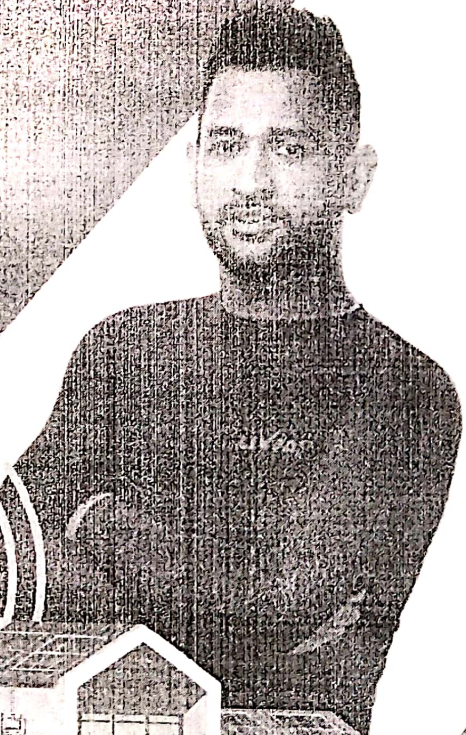

Shubh
अध्यक्ष

Shubh
सचिव

Shubh
पुरतः कार्यकारी अधिकारी

दत्तमयाग ऑफो प्रोड्यूसर कंपनी लि
- श्री. ए. वि. शर्मा

1. Index

- 1.0 Index
- 2.0 About LIVFAST Solar
- 3.0 Scope of Work
- 4.0 Generation Statistics
- 5.0 Project Timeline
- 6.0 BOM – Technical offer
- 7.0 Commercial offer
- 8.0 Terms & Conditions

DOCUMENT REQUIRED

1. AADHAR CARD
2. PAN CARD
3. LIGHT BILL
4. LIGHT BILL PAID RECEIPT
5. PROPERTY TAX RECEIPT
6. PASSPORT SIZE PHOTO (4)
7. STAMPED PAPER RS. 100/- (2)



We hereby confirm

M/s SAI ELECTRICALS SERVICES-MAHARASHTRA

as **AUTHORISED SERVICE PARTNER**

for all **LIVFAST** Products.

Valid up to 31st March 2022

Suresh Chand
Vice President



Dipali
अध्यक्ष

दत्तप्रयाग अग्रो फोड्युस्तर कंपनी लि
परभणी ता.जि.परभणी

Shobha
सचिव





Shreyas
मुख्य कार्यकारी अधिकारी

About Livfast

Livfast is the leading power specialist in India with a widespread portfolio of Power back up solutions such as Automotive Batteries, Inverters, Inverter Batteries, Solar Applications. We listen and understand the needs of the consumers and answer these needs in form of our products. We, at Livfast strive to be constantly innovating to make lives across the country easier for our consumers.

4.0 Generation Statistics.

Capacity of the system	Annual Generation Assurance (UNIT)	Yearly Degradation in Generation
10KW	14000	1%YOY



Dipali

अध्यक्ष

विकासकर्म अॅण्ड प्रोड्यूसर कंपनी लि
प्लॉट नं. १०, सिटी रोड, मुंबई

Shobha

साथिनी

[Signature]

मुख्य कार्यकारी अधिकारी



5.0 Timeline Methodology & Implementation Approach

TIME LINE FOR PROJECT EXECUTION for 10 KW		WEEK 1	WEEK 2	WEEK 3	WEEK 4
Sr No	Activity				
1	Receiving PO with the Payment				
2	Site Survey				
3	Design ,Procurement& assembly of all the material required				
4	Preparation of Structure with GI Coating				
5	material .Payment installment				
6	,PCC civil work if any				
7	AC Cabling and Earthing				
8	Solar Panels Mouniting				
9	DC Cabling				
	Mounting Inverters , ACDB , LT Panel 10 Integration				
11	Testing &Comissioning& Handover				

- Note Net Meter Installation and MSEDCL liasoning is not included in the Timeline Provided.
- Above Timeline can adhered only if the Payment installments are received as per Payment Terms.



Dipali
राखित

Shubha
राखित

Shubha

राखित अॅग्री प्रोड्यूसर कंपनी लि
जंबोनी ता. जि. परभणी

अॅग्री कॉन्ट्रॉलरी अधिकारी

S.N	Description	Size/Rating	Quantity	Make	IEC Standards
1	Solar PV Module crystalline Type	335	30	LIVFATS	IEC 61215:2005 - Ed 2, IEC 61730 - Ed1 & Ed2, IEC 61701, IEC 62804, MNRE, UL, CE, IS:14286, IS-61215, IS-61730
2	Array Junction Box / DC Side Distribution Box (DCDB)	3-WAY	1	STANDARD	IP 65
	DC Fuse - Positive	15ADC	(1 per string)	Elmx/CopperBus	IEC 60947 part I,II, III / IS 60947 Part I,II,III
	DC Surge Protection Device (SPD) for PV	Type 2	2	Mersen/Phoenix	EN 50521
3	Inverter With Remote Monitoring	10 KW	1	GROWAAT/ LIVFAST	
4	AC Side Distribution Box (ACDB)-	3-WAY	1	STANDARD	IP 65 IEC 60947 part I,II, III / IS 60947 Part I,II,III EN 50521
5	DC Wiring - Solar PV Modules to inverter	4Sqmm		Polycab	IEC 60227 / IS 694 IEC 60502 / IS 1554
	Solar DC Cable	4sqmm - 1 Core	>300m		
6	MC4 Connectors - Male		15	Multicontact/ Elmex	
	MC4 Connectors - Female		15		
7	Cable Conduit - HDPE/PVC PIPE/Cable Tray		Actuals	Standard	
8	AC Wiring - Inverter to ACDB			Polycab	IEC 60227 / IS 694
	Cable, 4-core	10 sqmm	15Mt		IEC 60502 / IS 1554
9	Mounting Structure Ground Mount - Hot Dipped G.I.	10 KW	SET	Standard Raised Structure	
10	LT CT net Meter	Various			



Dipak

अध्यक्ष

दत्तप्रियम ऑग्रे प्रोड्यूसर कंपनी लि
पारभणी ता.पि.परभणी

Shobho

राचित

Shubho

मुख्य कार्यकारी अधिकारी

₹.0 Budgetary Quotation- Commercial

Budgetary Quotation for 10KW					
Sr. No.	System material Description	Capacity	Qty	Unit	Total amt. In (INR)
1	Solar PV Module - LIVFAST	335	30		6,03,000/-
2	Grid tied Inverter with Remote Monitoring, LIVFAST / GROWAAT	10 KW	1		
3	Cables & Other related accessories		Complete	Set	
4	Junction Boxes, DCDB & Other accessories		Complete	Set	
5	Earthing Set and other Balance of System		Complete	Set	
GST :-					72,360/-
Total Cost					6,75,360/-
1	Installation ,Labour ,Commissioning , LT Net Metering ,				15000/-

- Additional Cable & Cable laying costs of AC cables from Main LT panel to Net Meters, if obligated from MSEB.
- Any civil work required to lie above cable.
- Data services & Wi-Fi device or router to share data from inverter to cloud \
- HT Net Metering is not included in the proposal .(Estimated time line for HT net metering would be between 3 to 6 Months)
- SMART meter installation would require some additional hardware in electrical box, such as CTs or additional bus bars , cost for such things will be at actual not more than 25000 Rs.



Dipali

अध्यक्ष
दत्तप्रयाग ऑटो प्रोड्यूसर कंपनी लि

Shobha

सचिव

Shubha

मुख्य कार्यकारी अधिकारी



3.0 Terms & Conditions

Commercial terms and conditions

- 1) Terms of payment:
 - 100 % Advance before Material dispatch
- 2) Price basis: The price is F.O.R destination.
- 3) Taxes & duties
 - All Inclusive in offer
- 4) Delivery / completion period:
 - Within 2 to 4 weeks from the date of your technically and commercially clear purchase Order along with advance. Actual work will be commenced after approval from Client if the advance payment is not made as per the terms and conditions or if any of the payment eligible is not made in time or if the technical specifications are changed during the execution of the order within the available in time or if subsequent changes, which delay the delivery, then the time limit will be extended proportionately.
 - Timeline of the project along Pert Chart will be submitted after finalization of project.
- 5) Validity of offer: This offer is valid for 10 days from the date of offer and thereafter it will be subject to our reconfirmation.
- 6) Limitation to liability: Our liability in respect of any defect or failure of the equipment supplied therefo. is limited to making good by replacing or repairing defects which under proper use appear therein (provided the equipment is installed, operated, maintained as per our instruction manual) and arise solely from faulty design, materials or workmanship within warrantee period. At the termination of which period, all liability on our part shall cease.
- 7) Warrantee Guarantee & Standard Terms:
 - 8 Years Warranty on LIVFAST Inverter, with further extension possible on payment basis.
 - 25 Years Performance Generation Warranty on Solar Panels as provided by Manufacturer.
 - Protection Devices such as SPDS, MCBS, and Fuses will not be covered under warranty.
 - Parts and Components, which are repaired or replaced during such period, are warranted for the original warranty period only and will not carry any extended warranty.
 - 2 Years on Warranty on system, limited to devices which are caused due to external defects.
 - Physical Damages caused to whatsoever reasons won't be covered under warranty.



Dpali
अध्यक्ष

दरम्यान ऑफो प्रोव्हासर कंपनी लि
रा. जि. पारभणी

Shobha
सचिव

Shubh
मुख्य कार्यकारी अधिकारी



- If the equipment is not repairable at site, the same has to be sent at our workshop on freight prepaid basis after obtaining our consent in writing and we shall make good the defect and return back to you on freight to pay basis.
 - The warranty shall not apply to defects resulting from: Wilful damage or negligence, normal wear and tear, Installation and/or maintenance by Purchaser or a third party without supplier's prior written consent, Misuse or abuse of Equipment. Modifications or alterations made by Purchaser or a third party without supplier's written consent.
 - AMC considered for two years in non-comprehensive, with Submission of Quarterly generation and maintenance report.
 - After Second Year to maintain System Healthy, Non-Comprehensive AMC charges will be as per O&M plans which is considerable around 2 % of the project cost with 10% Escalation YOY.
- 9) Right and lien of property: We shall retain the right on equipment, materials or parts supplied by us under this quotation until full value thereof as per our invoice has been fully paid to us as per terms and condition.

Submitted By
SAI ELECTRICALS SERVICES (MNRE CHAINEL PARTNER)
OPP A P Patel Station Road Parbhani Maharashtra Mob. 9422177122, 9421089353
Mail id: nbt.ses@gmail.com



Dipali

अध्यक्ष

दत्तप्रयाग ऑटो प्रोड्यूसर कंपनी लि

Shabbir

सचिव

Shamshad

पूरा कार्यालय अधिकारी

