



Zaheer Agro Engineering Works

B-1 Unit, Industrial Estate, SARANGAPUR - 503 186, Nizamabad (T.S)
Sarangapur, S.B.I (R.T.G.S. Bank Code No. S.B.I. N0020117)

GSTIN : 56AADP79AR1W1Z
TIN NO : 56916218571
MD ZAHEER - 98494-16254
MOHD WASKY - 88611-56838

Date: 25th July 2022

QUOTATION


M/s Godamai Rural Farmers Producer Company Ltd.,
Shelgaon Tq, Dharmabad Dist, Nanded Cell : +91-9421850012

SCOPE OF SUPPLY/PRICE SCHEDULE
WHEAT/ SEED CLEANING/ GRADING EQUIPMENTS .

S#	PARTICULARS	QTY	RATE(INR)	TOTAL (INR)
----	-------------	-----	-----------	-------------

1 **Zaheer Agro Fine Cleaner and Grader Model ZF-4 in Standard construction.**

With inlet with feed roller, pre-aspiration, tail aspiration and waste outlet on right hand side. Sieveboat with 1 scalping

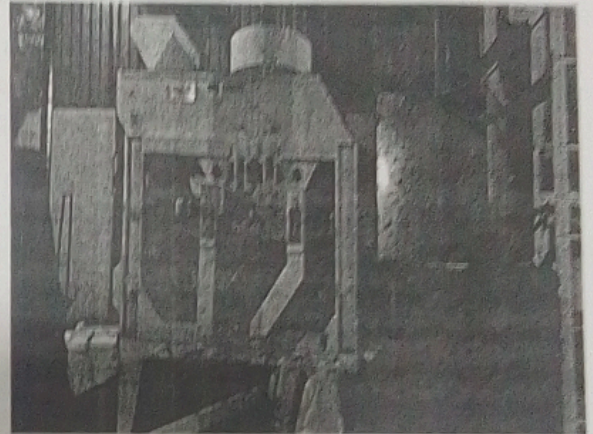

screen (1screen part), 2 long grading screen (3 screen parts) and 1 long sand screen (3 screen parts) & all screens with ball frame for rubber ball cleaning. Total screen area: 7.50 sq.m. with built-in fan with 5 H.P motor, fixed drive with 2 HP motor for sieveboat Incl. One set of screens (7 nos) of your choice with paint Green RAL 6024 & Off White.


Zaheer Agro 5 Fan Gravity ZG-4 Model in

Left Hand construction with VFD for Vari-Speed

With aspiratory feeder for 5 kgs capacity and Including deck of Dimension 1055 mm X 2340 mm with (SS) 16 wire mesh



Adjustable eccentric rpm through VFD, Separate Drive for Blender, air quantity, feed rate and deck inclination sidewise And lengthwise. Incl. Motor of 7.5 HP, fixed drive with 2 HP, VFD, **Motor of Blender**, Machine with paint Green RAL 6024 & Off White



Zaheer Agro Engineering Works

B	PROJECT ACCESSORIES		
3	V.B ELEVATOR (with 6"inch Nylon Belt & Bucket And Gear Box Motor 1 HP)	4	
4	HOLDING BIN FOR FINE-CLEANER, ZF-4	1	
5	WASTE PRODUCT CHUTE FOR FINE-CLEANER	1	
6	MOUNTING STAND WITH EXTENSION PLATFORM FOR ZF-4 MODEL	1	
7	HOLDING BIN WITH MTG STAND FOR GRAVITY SEPARATOR ZG-4 MODEL Vol-1.0 M3	2	
	SUB TOTAL (AFTER DISCOUNT)		17,25,000.00
	GST @5%	EXTRA	86,250.00
	GRAND TOTAL – FOR Site		18,11,250.00
			<i>Rupees Eighteen Lakhs Eleven Thousand Two Hundred and Fifty Only</i>
	ERECTION CHARGES – FOR Site		50,000.00
	GRAND TOTAL – FOR Site		18,61,250.00
			<i>Rupees Eighteen Lakhs Sixty One Thousand Two Hundred and Fifty Only</i>
	PANEL BOARD		1,35,000.00
	GST @18%	EXTRA	24,300.00
	TOTAL OF PANEL BOARD		1,59,300.00
	GRAND TOTAL WITH MACHINERY AND PANEL BOARD		20,20,550.00
			<i>Rupees Twenty Lakhs Twenty Thousand Five Hundred and Fifty Only</i>

Exclusions

1. All the civil works, Electrical works, Earth Pits & Earthing Materials
2. Any other items which is not mentioned in our offer, but required for the functioning of the system.
3. GST will be to customer account as per the rates prevailing on the time of shipment.



Zaheer Agro Engineering Works

COMMERCIAL TERMS AND CONDITIONS

1. Electrical Capacity Total HP – 21 HP
2. Price The Price Quoted are FOR Site as your requirement.
3. FRIEGHT ON CUSTOMER BEHALF IF APPLICABLE
4. TRANSIT INSURANCE ON CUSTOMER BEHALF IF APPLICABLE
5. DELIVERY Delivery within 6-8 (Six to Eight) Weeks in each
6. PAYMENT 50% advance along with purchase order and balance against Proforma invoice before dispatch.
7. INSTALLATION AND COMMISSIONING The installation of machineries will be done by you and we will depute our Technician/ Engineer or Technician from our representative to commission the plant