


153

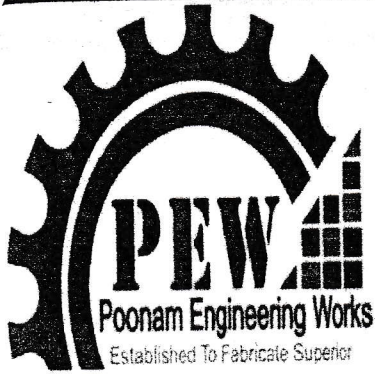

||SHREE||

ISO 9001:2015
GST NO. 27AJFPV5378N1Z8

POONAM ENGINEERING WORKS

Specialize in: -

Fully Automatic Dall Mill, Grain Cleaning Plant, Grain Dryer, Besan Plant, Atta Chakki Plant, Vibro Separator (MTRA), Di-stoner, Gravity Separator, Hammer, etc.

PLOT NO N-243, MIDC PHASE IV, AKOLA - 444104 (MS)

Mo. +918080485406, +91 9371007484

Web;-www.poonamengworks.in

Email:poonamengworks4@gmail.com

{SEND BY - POOJA PATIL }

POLISHER

12.	M/s Warm. *Φ 8'' length 12 feet U- m/s 16 Gauge, In side Φ1.5'' m/s shafting, with motor 1 HP IE2.	03	38500/-	115500/-
13.	Buff Polisher. *Φ12''x30'' with Motor stand in side Φ2'' m/s shafting, Bering 3pc, the foundation of this machine is made 4'' c-channels, with motor 1 SHP.	01	165000/-	165000/-
14.	Bucket Elevators. *Inside Φ1.25'' m/s shafting, pulley, UC Bering, cotton nylon belt 4'', M/S Bucket- 4'', height 16', m/s box 18-gauge, m/s top bottom 16 gauge, with motor 2 HP IE2.	01	51000/-	51000/-
15.	Machinery Structure, Pipe.	00	244200/-	244200/-
16.	Transportation charges.	-	218316/-	218316/-
17.	Machinery Fitting Charges.	-	250000/-	250000/-
			Total	5194916/-
			GST @18%	935084/-
			Total Amount	6130000/-

SPECIFICATION

MODEL	PEWDMT-01
CAPACITY	1 TPH
POWER	108 HP
MACHINE TYPE	AUTOMATIC

Terms & Condition

- Prices Net - All Price are Ex- Factory Akola.
- Transportation Charges as applicable.
- Packing and Forwarding Charges Extra at Actual.
- Delivery Period - In 2 months from the date of Receipt you confirm order.
- Payment - 70% Advance at the time of confirmation of order.
- Balance 30% Payment before Dispatch.
- Quotation Valid for 15 days, otherwise Subject to our Confirmation.
- Electric panel, electric fitting & civil work party will provide.
- Motors & Gear Motors mfg. difficulties for near service centre provide.
- Total Electric load 108 HP

I Agree Terms & Condition
For Purchaser

Signature

For Poonam Engineering Works
Akola
Authorized Signatory