


STAMP OF APPROVAL :-



AREA DETAILS OF ONION SHEDS :-

SHED AREA = 53' x 90' (10 nos. of chawls)

SHED AREA = 53' x 60' (03 nos. of chawls)

DIST. BETWEEN 2 SHEDS = 11 FEET (horizontal passage)

110' WIDE ROAD TOWARDS NORTH-SOUTH DIRECTION AT WEST.

20' WIDE ROAD TOWARDS NORTH-SOUTH AT CENTER.

143' WIDE ROAD TOWARDS NORTH-SOUTH DIRECTION AT EAST.

21' WIDE MARGINAL DISTANCE FROM PLOT LINE AT EAST DIRECTION.

DESIGN BY -

DR. AMIT S. HIRE (B.E. CIVIL, A.I.C.T.E.)

VAASTU ENGINEERS & ARCHITECTS

MAIN ROAD, NEAR NEW BUS STAND,

TAHARABAD, TAL. SATANA, (NASHIK)

MOB. No. 9881884542


PROPOSED ONION STORAGE SHEDS

PANZRAKAN FARMER'S PRODUCER

COMPANY Ltd. BHADNE, TAL. SAKRI.



PROJECT AT :- KAVTHE, GAT NO. 548/2/2/A

TAL. SAKRI, DIST. DHULE. (424304)

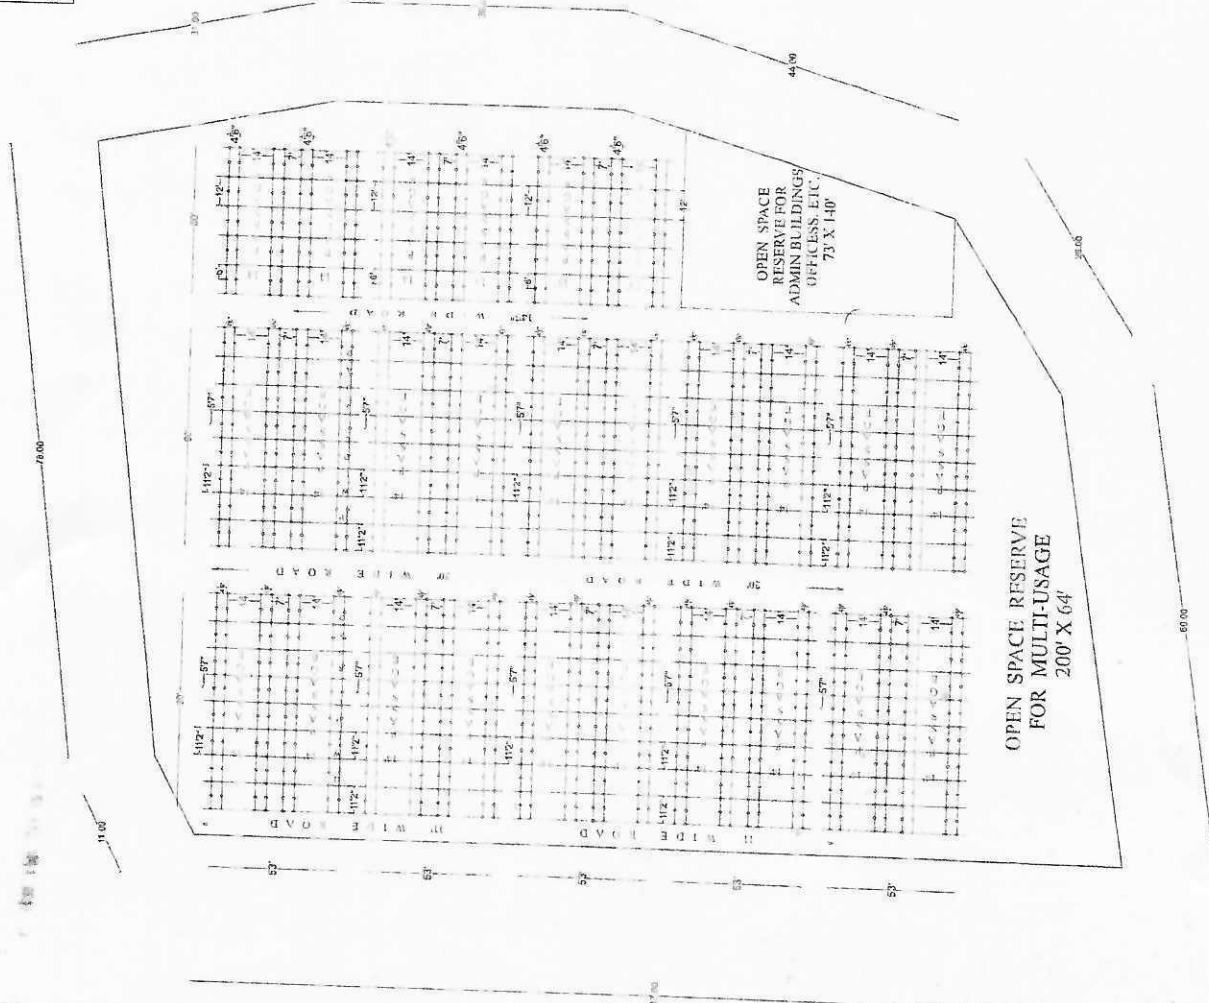

PROPOSED ONION STORAGE SHEDS LINE PLAN

Signature of Dr. Amit Snashikant Hire
B. E. Civil
Vastu Engineers & Architects
REG NO. U.E-00235





VAASTU ENGINEERS & ARCHITECTS, TAHARABAD

Er. Amit S. Hire (B.E. CIVIL, A.I.C.T.E.)

Cell No.9881884542

OFFICE ADD. : MAIN ROAD, NEW BUS STAND, TAHARABAD.

NAME OF WORK Detailed Estimate for Providing & Fabricating
Onion Storage Structure (Sheds)
in Cat No. 548/2/2/A At - Kavthe
Tal. Sakri, Dist. Dhule.

Clients Name : PANZRAKAN FARMERS PRODUCER Co. Ltd. BHADNE


ABSTRACT SHEET

Item No.	Particulars	Qty.	Rate	Unit	Amount
----------	-------------	------	------	------	--------

1	<p>Excavation --</p> <p>Earthwork in Excavation for foundation over Areas Trenches, column bases , floor, plinth protection etc. In ordinary soil/sandy soil including cost of all shuttering & shoring to sides , dewatering the trenches , dressing & levelling the bed for foundations and refiling the Excavated materials around foundations & selected excavated material</p>	46.26	450	CUM	20803.00




(Handwritten signature)

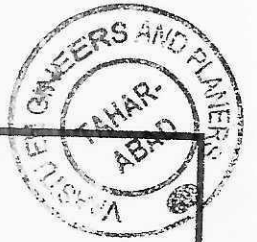

2	Sand filling				
	Providing sand filling of specified Depth for foundations, including spreading, ramming, consolidating and curing etc. complete including cost & conveyance of labour, materials, taxces, royalties, T&P etc.	52.61	650	CUM	34196.50
3	Providing and laying in situ cement concrete of M-20 grade of trap / granite/quartzite/gneiss metal of R.C.C. work for 0.230 thick wall upto plinth hight and steel stanchions including bailing-out water .. etc, complete. 25/11	186.4	5300	RMT	987920.00
4	Structural Steel				
	Providing and fabricating structural steel work in rolled sections fixed with connections plates or angle cleats main and cross beam hips jack and rafter purlins connected to truss and the like as per details design drawing or as directed including cutting, fabricating, hoisting, erecting, fixing in position making welded connection on coat anticorrosive paint and it over	178.1 6	68103	MT	12133230.4





	two coats of oil paints approved quality and shade.				
5	Jali –				
	Providing GI Chain Link of size 35x30 8mm gauge thick for onion chawl completed...	4344. 42	190	MT	825440.00
6	Roofing Sheets –				
	Providing Corrogated Roof sheeting Completed....	2133. 1	186	RS/Kg	396759.80
				(SAY)	1,43,98,348
7	CONTINGENCIES	1%			1,44,000.00
				TOTAL	1,45,42,348.00

In words :- One Cr. Forty Five Lakhs Forty Two Thousand Three Hundred Forty Eight Rupees Only.....

Authorised & Estimated By

Er. Amit S. Hire (B.E. Civil)

**mit Snashikant Hire
B. E. Civil**

