

NAME OF WORK:- CONSTRUCTION OF SHED FOR CLEANING, GRADING
SORTING UNIT 86.68 SQ MT FOR DESHMUKH FARMERS PRODUCER
COMPANY LTD GUT NO. 91 ,PAWDEWADI (BK.) TQ. NANDED &
DIST. NANDED

DIVISION :-
SANCTIONED ESTIMATE :- 3705223
FUND HEAD :-
MAJOR HEAD :-
MINOR HEAD :-
SERVICE HEAD :-
DEPARTMENTAL HEAD :-

NAME OF WORK:- CONSTRUCTION OF SHED FOR CLEANING, GRADING
SORTING UNIT 86.68 SQ MT FOR DESHMUKH FARMERS PRODUCER
COMPANY LTD GUT NO. 91 ,PAWDEWADI (BK.) TQ. NANDED &
DIST. NANDED

Administrative Approved under

No. Dated Rs. 3,705,223

Technical sanction under

No. Dated Rs. 3,705,223

Estimated prepared by

Er. S.B. Allewar

And checked by

Er. S.B. Allewar


NAME OF WORK:- CONSTRUCTION OF SHED FOR
CLEANING, GRADING SORTING UNIT 86.68 SQ MT FOR
DESHMUKH FARMERS PRODUCER COMPANY LTD GUT NO. 91
, PAWDEWADI (BK.) TQ. NANDED & DIST. NANDED

RECAPITULATION SHEET

(A) COST OF CIVIL WORK	Rs.	2806859.00
(B) COST OF ELECTRIFICATION	Rs.	120099.00
(C) ROYALTY CHARGES	Rs.	28358.74
(D) MATERIAL TESTING CHARGES	Rs.	69355.00
TOTAL	Rs.	3024671.74
(E) ADD 18% GST	Rs.	544440.91
(F) ADD 0.5% INSURANCE	Rs.	15123.36
(G) ADD CONTIGENCIES 4%	Rs.	120986.87
TOTAL	Rs.	3705222.88

SAY RS. 37.05 LAKHS

[Handwritten Signature]

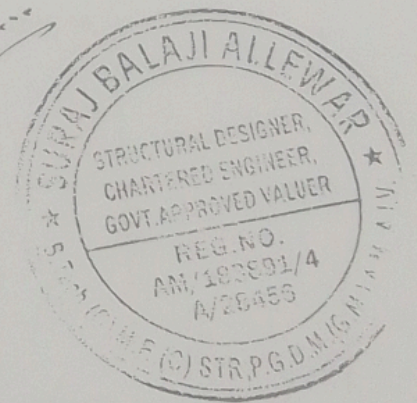

NAME OF WORK:- CONSTRUCTION OF SHED FOR CLEANING, GRADING
SORTING UNIT 86.68 SQ MT FOR DESHMUKH FARMERS PRODUCER COMPANY
LTD GUT NO. 91, PAWDEWADI (BK.) TQ. NANDED & DIST. NANDED

ABSTRACT SHEET

SR. NO	S.S.R.I TEM NO.	Description	QUANTITY	Unit	Rate	AMOUNT
1	2.05	Cutting down trees including trunks and branches with girths above 270cm to 450cm and stacking the materials neatly with all lifts and lead of 1000m. as directed and earth filling in the depression/pit if any.	10	Nos.	3217.76	32177.60
2	2.07	Clearing grass and removal of rubbish up to a distance of 50 metres outside the periphery of the area .	86.373	Sqm	4.16	359.31
3	21.04	Excavation for foundation in earth. soils of all types, sand, gravel and soft murum, including removing the excavated material upto a distance of 50 metres beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift from 1.5m to 3.0m) By Mechanical Means	40.5	Cum	99.84	4043.52
4	21.07	Excavation for foundation in hard murum including removing the excavated material upto a distance of 50 metres beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift from 1.5 to 3.0m) By Manual Means	40.5	Cum	430.56	17437.68
5	24.01	Providing and laying Cast in situ Ready Mix cement concrete in M-10 of trap granite quartzite gneiss metal for foundation and bedding including bailing out water, Steel centering, formwork, laying, pumping, compacting, roughening them if special finish is to be provided, finishing if required and curing complete, with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	3.0375	Cum	6086.65	18488.19
6	25.13	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap granite quartzite gneiss metal for R.C.C. work in foundations like raft, strip foundations, grillage and footings of R.C.C. columns and steel stanchions etc including bailing out water, Steel centering, formwork cover blocks, laying/pumping, compaction and curing roughening the surface if special finish is to be provided (Excluding reinforcement and structural steel) etc complete, with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	8.1	Cum	7601.93	61575.61


7	25.33	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap / granite /quartzite/ gneiss metal for R.C.C. columns as per detailed designs and drawings or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction finishing the formed surfaces with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc. complete.(Excluding reinforcement and structural steel) with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	15.438	Cum	14549.13	224609.42
8	25.52	Providing and laying Cast in situ/Ready Mix cement concrete in M-25 of trap/ granite/ quartzite/ gneiss metal for R.C.C. beams and lintels as per detailed designs and drawings or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction and roughening the surface if special finish is to be provided and curing etc. complete. (Excluding reinforcement and structural steel).with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	8.2117125	Cum	12973.53	106534.8747
9	26.07	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap/ granite/ quartzite/ gneiss metal for R.C.C. chajja as per detailed design and drawings including steel centering, formwork, cover blocks, laying/pumping, compacting and roughening the surface if special finish is to be provided and curing complete. (Excluding reinforcement and structural steel) with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	7.245	Cum	14704.09	106531.11
10	25.72	Providing and laying Cast in situ Ready Mix cement concrete M-25 of trap granite quartzite gneiss metal for R.C.C. slabs and landings as per detailed designs and drawings including steel centering, formwork, cover blocks, laying/pumping, compaction finishing the formed surfaces with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc complete.(Excluding reinforcement and structural steel) with fully automatic micro processor	4.9936	Cum	14704.09	73426.33
11	26.33	Providing and fixing in position TMT - FE - 500 bar reinforcement of various diameters for R.C.C. pile caps, footings, foundations, slabs, beams columns, canopies, staircase, newels, chajjas, lintels, piers, copings, fins, arches etc as per detailed designs, drawings and schedules, including cutting, bending, hooking the bars, binding with wires or tack welding and supporting as required complete	4.19	MT	93291.12	390889.79
12	21.38	Providing dry trap granite quartzite gneiss rubble stone soling 15 cm to 20 cm thick including hand packing and compacting etc. complete.	86.373	Cum	1437.28	124142.19

13	21.37	Filling in plinth and floors with contractors material/brought from outside and approved by Engineer incharge in layers of 15 cm to 20 cm including watering and compaction etc.complete.	51.8238	Cum	826.80	42847.92
14	27.01	Providing second class Burnt Brick masonry with conventional/ I.S. type bricks in cement mortar 1:6 in foundations and plinth of inner walls/ in plinth external walls including bailing out water manually , striking joints on unexposed faces, raking out joints on exposed faces and watering etc. Complete.	4.974684	Cum	8680.16	43181.06
15	27.03	Providing second class Burnt Brick masonry with conventional I.S. type bricks in cement mortar 1:6 in superstructure including striking joints, raking out joints, watering and scaffolding etc. Complete	17.411394	Cum	8429.52	146769.74
16	32.01	Providing internal cement plaster 6 mm thick in a single coat in cement mortar 1:4 without neeru finish to concrete surface in all positions including scaffolding and curing etc. complete.	148.72	Sqm	333.45	49590.74
17	32.06	Providing internal cement plaster 20mm thick in Single coats in cement mortar 1:5 without neeru finish. to concrete, brick surface, in all positions including scaffolding and curing etc. complete	148.72	Sqm	512.33	76193.78
18	32.11	Providing sand faced plaster externally in cement mortar using approved screened sand. in all positions including base coat of 15 mm thick in cement mortar 1:4 using waterproofing compound at 1Kilogramper cement bag curing the same for not less than 2 days and keeping the surface of the base coat rough to receive the sand faced treatment 6 to 8 mm thick in cement mortar 1:4 finishing the surface by taking out grains and curing for fourteen days scaffolding etc.complete.	148.72	Sqm	664.56	98833.36
19	33.31	Providing and laying in situ cement concrete M30 with tremix treatment for 200 mm thickness for flooring with groove cutting of 4mm wide and 20mm deep with necessary refilling with bitumen etc. complete	86.373	Cum	1546.01	133533.27
20	36.03	Providing and applying white-wash in two coats on old / new plastered or masonry surfaces and asbestos cement sheets including scaffolding and preparing the surface by brushing and brooming down etc. complete.	148.72	Sqm	12.48	1856.03
21	36.11	Providing and applying washable oil-bound distemper of approved colour and shade to old and new surfaces in two coats including scaffolding, preparing the surfaces. (excluding the primer coat.) etc. complete.	148.72	Sqm	49.92	7424.10
22	35.26	Providing and applying two coats of exterior weather shield paint of approved manufacture and of approved colour to the plastered surfaces including cleaning ,preparing the plaster surface ,applying primer coat ,scaffolding if necessary, and watering the surface for two days etc. complete NOTE: For Item One Number 15 to 18 prior approval of Superintending Engineer will be necessary	148.72	Sqm	306.80	45627.296

23	39.68	Providing and fixing in position powder coated aluminium louvered windows / ventilator of various sizes with powder coating as per detailed drawing and specifications including aluminium frames 80 x 38 mm x 1.22 mm box type, 5 mm thick sheet glass louvers, of approved quality etc. complete.	5.04	Sqm	3605.68	18172.63
24	39.24	Providing and fixing rolling shutter fabricated from steel laths of minimum thickness 0.9 mm with lock plate of 3.15 mm thickness reinforced with 35 x 35 x 5 mm angle section fitted with sliding bolts and handles for both sides, deep M.S. channel section of depth and thickness not less than 65 mm and 3.15 mm respectively with hold fast arrangements, M.S. Bracket plate 300 x 300 x 3.15 mm minimum size and shape with square bar, suspension shaft of minimum 32 mm diameter, hood cover of M.S. sheet not less than 0.9 mm thickness and of any size at top and safety devices including mechanical gear operation arrangement consisting of worm gear wheels and worms of high grade cast iron or mild steel and one coat of red lead primer etc. complete. (I.S. 62481979) (Without mechanical gear)	30	Sqm	5022.16	150664.8
25	2.26	Conveying materials obtained from road cutting including all lifts, laying in layers of 20cm. to 30cm. breaking clods, dressing to the required lines, curves, grades and section, watering and compacting to not less than 97% of standard proctor density for a lead of 300m. to 500m. inclusive, from the site of excavation to the site of deposition as directed.	86.373	Cum	408.72	35302.37
26	21.24	Providing preconstructional antitermite treatment as per I.S. 6313 (Part-II) by treating the top surface of plinth filling at the rate of 5 litres of emulsion concentrate at 1.0 percent of chloroxyrifos per One Square Metre of surface area covering ten years guarantee on bond paper	86.373	Sqm	112.32	9701.42
27	50.6	Compacting the sub grade gravel oversize metal (200 mm loose) layers for all width with Vibratory roller having weight 8 to 10 MT. including necessary, labour, materials and artificial watering complete.	86.373	Sqm	38.48	3323.63
28	2.31	Compacting the hard murum side widths including laying in layers on each side with vibratory roller including artificial watering etc. complete.	86.373	Sqm	21.84	1886.39
29	23.01	Providing and fabricating structural steel work in rolled sections like joists, channels, angles, tees etc. as per detailed design and drawings or as directed including cutting, fabricating, hoisting, erecting, fixing in position making riveted / bolted / welded connections without connecting plates, braces etc. and including one coat of anticorrosive paint and over it two coats of oil painting of approved quality and shade etc. complete.	6.23	MT	105917.76	659867.64
30	38.04	Providing and fixing corrugated galvanised iron sheets of 0.63mm thick (24 B.W.G.) for roofing without wind tiles including fastening with galvanised iron screws and bolts, lead and bitumen washers as per drawing etc. complete (Weight of 5.5 Kilogram sq.m.)	105	Sqm	904.80	95004.00
31	36.11	Providing and applying washable oil-bound distemper of approved colour and shade to old and new surfaces in two coats including scaffolding, preparing the surfaces, (excluding the primer coat.) etc. complete	205	Sqm	49.92	10233.60

32	35.14	Providing and applying two coats of water proof cement paint of approved manufacture and of approved colour to old plastered surfaces including scaffolding if necessary, cleaning and preparing the surface, watering for two days etc. complete.	205	Sqm	81.12	16629.60
						2806859.00
(A) TOTAL						2806859.003
(B) TOTAL AMOUNT						

[Handwritten Signature]

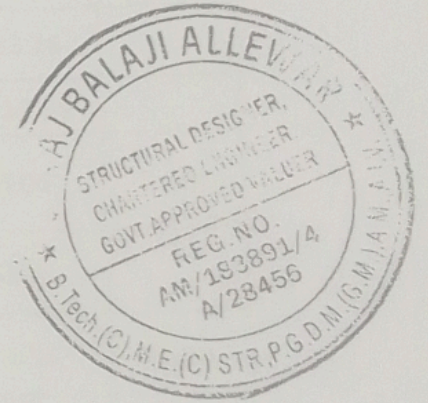

NAME OF WORK:- CONSTRUCTION OF SHED FOR CLEANING, GRADING
 SORTING UNIT 86.68 SQ MT FOR DESHMUKH FARMERS PRODUCER
 COMPANY LTD GUT NO. 91 ,PAWDEWADI (BK.) TQ. NANDED &
 DIST. NANDED

RATE ANALYSIS

SR. NO	S.S.R.I TEM NO.	Description of Item	S.S.R. Rate	Unit
1	2.05	Cutting down trees including trunks and branches with girths above 270cm to 450cm and stacking the materials neatly with all lifts and lead of 1000m. as directed and earth filling in the depression/pit if any.	3094.00	Nos.
		4 % Muncipal Council Area Charge	123.76	
		Completed Rate	3217.76	
2	2.07	Clearing grass and removal of rubbish up to a distance of 50 metres outside the periphery of the area .	4.00	Sqm
		4 % Muncipal Council Area Charge	0.16	
		Completed Rate	4.16	Sqm
3	21.04	Excavation for foundation in earth, soils of all types, sand, gravel and soft murum, including removing the excavated material upto a distance of 50 metres beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc.	96.00	Cum
		4 % Muncipal Council Area Charge	3.84	
		Completed Rate	99.84	Cum
4	21.07	Excavation for foundation in hard murum including removing the excavated material upto a distance of 50 metres beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift from 1.5 to 3.0m) By Manual Means	414.00	Cum
		4 % Muncipal Council Area Charge	16.56	
		Completed Rate	430.56	Cum

5	24.01	Providing and laying Cast in situ/Ready Mix cement concrete in M-10 of trap/ granite/ quartzite/ gneiss metal for foundation and bedding including bailing out water, Steel centering, formwork, laying/pumping, compacting, roughening them if special finish is to be provided, finishing if required and curing complete, with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	5830.00	Cum
		4 % Muncipal Council Area Charge	233.20	
		CEMENT Lead Charges(0.01 x 150.41)	1.50	
		CRUSHED SAND Lead Charges (0.02 x 345.15)	6.90	
		SAND Lead Charges (1 x 15.04)	15.04	
		Completed Rate	6086.65	Cum
6	25.13	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap / granite /quartzite/ gneiss metal for R.C.C. work in foundations like raft, strip foundations, grillage and footings of R.C.C. columns and steel stanchions etc. including bailing out water, Steel centering, formwork ,cover blocks, laying/pumping, compaction and curing roughening the surface if special finish is to be provided (Excluding reinforcement and structural steel) etc. complete. with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	7287.00	Cum
		4 % Muncipal Council Area Charge	291.48	
		CEMENT Lead Charges(0.01 x 150.41)	1.50	
		CRUSHED SAND Lead Charges (0.02 x 345.15)	6.90	
		AGG Lead Charges (1 x 15.04)	15.04	
		Completed Rate	7601.93	Cum
7	25.33	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap / granite /quartzite/ gneiss metal for R.C.C. columns as per detailed designs and drawings or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction finishing the formed surfaces with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc complete.(Excluding reinforcement and structural steel) with fully automatic micro processor based PLC with	13967.00	Cum

		4 % Muncipal Council Area Charge	558.68	
		CEMENT Lead Charges(0.01 x 150.41)	1.50	
		CRUSHED SAND Lead Charges (0.02 x 345.15)	6.90	
		AGG Lead Charges (1 x 15.04)	15.04	
		Completed Rate	14549.13	Cum
8	25.52	Providing and laying Cast in situ/Ready Mix cement concrete in M-25 of trap/ granite/ quartzite/ gneiss metal for R.C.C. beams and lintels as per detailed designs and drawings or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction and roughening the surface if special finish is to be provided and curing etc. complete. (Excluding reinforcement and structural steel).with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	12452.00	Cum
		4 % Muncipal Council Area Charge	498.08	
		CEMENT Lead Charges(0.01 x 150.41)	1.50	
		CRUSHED SAND Lead Charges (0.02 x 345.15)	6.90	
		AGG Lead Charges (1 x 15.04)	15.04	
		Completed Rate	12973.53	Cum
9	26.07	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap/ granite/ quartzite/ gneiss metal for R.C.C. chajja as per detailed design and drawings including steel centering, formwork, cover blocks, laying/pumping, compacting and roughening the surface if special finish is to be provided and curing complete. (Excluding reinforcement and structural steel). with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	14116.00	Cum
		4 % Muncipal Council Area Charge	564.64	
		CEMENT Lead Charges(0.01 x 150.41)	1.50	
		CRUSHED SAND Lead Charges (0.02 x 345.15)	6.90	
		AGG Lead Charges (1 x 15.04)	15.04	

		Completed Rate	14704.09	Cum
10	25.72	Providing and laying Cast in situ/Ready Mix cement concrete M-25 of trap/ granite / quartzite/ gneiss metal for R.C.C. slabs and landings as per detailed designs and drawings including steel centering, formwork, cover blocks, laying/pumping, compaction finishing the formed surfaces with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc. complete,(Excluding reinforcement and structural steel).with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	14116.00	Cum
		4 % Muncipal Council Area Charge	564.64	
		CEMENT Lead Charges(0.01 x 150.41)	1.50	
		CRUSHED SAND Lead Charges (0.02 x 345.15)	6.90	
		AGG Lead Charges (1 x 15.04)	15.04	
		Completed Rate	14704.09	Cum
11	26.33	Providing and fixing in position TMT - FE - 500 bar reinforcement of various diameters for R.C.C. pile caps, footings, foundations, slabs, beams columns, canopies, staircase, newels, chajjas, lintels pardis, copings, fins, arches etc. as per detailed designs, drawings and schedules, including cutting, bending, hooking the bars, binding with wires or tack welding and supporting as required	89703.00	MT
		4 % Muncipal Council Area Charge	3588.12	
		Completed Rate	93291.12	MT
12	21.38	Providing dry/ trap/ granite/ quartzite/ gneiss rubble stone soling 15 cm to 20 cm thick including hand packing and compacting etc. complete.	1382.00	Cum
		4 % Muncipal Council Area Charge	55.28	Cum
		Completed Rate	1437.28	Cum
13	21.37	Filling in plinth and floors with contractors material/brought from outside and approved by Engineer incharge in layers of 15 cm to 20 cm including watering and compaction etc complete.	795.00	Cum
		4 % Muncipal Council Area Charge	31.80	Cum
		Completed Rate	826.80	Cum


14	27.01	Providing second class Burnt Brick masonry with conventional/ I.S. type bricks in cement mortar 1:6 in foundations and plinth of inner walls/ in plinth external walls including bailing out water manually , striking joints on unexposed faces, raking out joints on exposed faces and watering etc. Complete.	7755.00	Cum
		4 % Muncipal Council Area Charge	310.20	
		BRICKS Lead Charges (1.03712 X 475)	492.63	
		CEMENT Lead Charges (0.079 x 150.41)	11.88	
		CRUSHED SAND Lead Charges (0.32 x 345.15)	110.45	
		Completed Rate	8680.16	Cum
15	27.03	Providing second class Burnt Brick masonry with conventional/ I.S. type bricks in cement mortar 1:6 in superstructure including striking joints, raking out joints, watering and scaffolding etc. Complete	7514.00	Cum
		4 % Muncipal Council Area Charge	300.56	
		BRICKS Lead Charges (1.03712 X 475)	492.63	
		CEMENT Lead Charges (0.079 x 150.41)	11.88	
		CRUSHED SAND Lead Charges (0.32 x 345.15)	110.45	
		Completed Rate	8429.52	Cum
16	32.01	Providing internal cement plaster 6 mm thick in a single coat in cement mortar 1:4 without neeru finish to concrete surface in all positions including scaffolding and curing etc. complete.	203.00	Sqm
		4 % Muncipal Council Area Charge	8.12	
		CEMENT Lead Charges (0.079 x 150.41)	11.88	
		CRUSHED SAND Lead Charges (0.32 x 345.15)	110.45	
		Completed Rate	333.45	Sqm
17	32.06	Providing internal cement plaster 20mm thick in Single coats in cement mortar 1:5 without neeru finish. to concrete. brick surface. in all positions including scaffolding and curing etc. complete	375.00	Sqm
		4 % Muncipal Council Area Charge	15.00	
		CEMENT Lead Charges (0.079 x 150.41)	11.88	
		CRUSHED SAND Lead Charges (0.32 x 345.15)	110.45	
		Completed Rate	512.33	Sqm

18	32.11	Providing sand faced plaster externally in cement mortar using approved screened sand, in all positions including base coat of 15 mm thick in cement mortar 1:4 using waterproofing compound at 1Kilogramper cement bag curing the same for not less than 2 days and keeping the surface of the base coat rough to receive the sand faced treatment 6 to 8 mm thick in cement mortar 1:4 finishing the surface by taking out grains and curing for fourteen days scaffolding etc.complete.	639.00	Sqm
		4 % Muncipal Council Area Charge	25.56	
		CEMENT Lead Charges (0.079 x 150.41)	11.88	
		CRUSHED SAND Lead Charges (0.32 x 345.15)	110.45	
		Completed Rate	664.56	Sqm
19	33.31	Providing and laying in situ cement concrete M30 with tremix treatment for 200 mm thickness for flooring with groove cutting of 4mm wide and 20mm deep with necessary refilling with bitumen etc. complete.	1464.00	Cum
		4 % Muncipal Council Area Charge	58.56	Cum
		CEMENT Lead Charges(0.01 x 150.41)	1.50	
		CRUSHED SAND Lead Charges (0.02 x 345.15)	6.90	
		AGG Lead Charges (1 x 15.04)	15.04	Cum
		Completed Rate	1546.01	Cum
20	36.03	Providing and applying white-wash in two coats on old / new plastered or masonry surfaces and asbestos cement sheets including scaffolding and preparing the surface by brushing and brooming down etc. complete.	12.00	Sqm
		4 % Muncipal Council Area Charge	0.48	Sqm
		Completed Rate	12.48	Sqm
21	36.11	Providing and applying washable oil-bound distemper of approved colour and shade to old and new surfaces in two coats including scaffolding, preparing the surfaces. (excluding the primer coat) etc. complete.	48.00	Sqm
		4 % Muncipal Council Area Charge	1.92	Sqm

		Completed Rate	49.92	Sqm
22	35.26	Providing and applying two coats of exterior weather shield paint of approved manufacture and of approved colour to the plastered surfaces including cleaning ,preparing the plaster surface ,applying primer coat ,scaffolding if necessary, and watering the surface for two days etc complete. NOTE: For Item One Number 15 to 18 prior approval of Superintending Engineer will be necessary	295.00	Sqm
		4 % Muncipal Council Area Charge	11.80	Sqm
		Completed Rate	306.80	Sqm
23	39.68	Providing and fixing in position powder coated aluminium louvered windows / ventilator of various sizes with powder coating as per detailed drawing and specifications including aluminium frames 80 x 38 mm x 1.22 mm box type, 5 mm thick sheet glass louvers, of approved quality etc. complete.	3467.00	Sqm
		4 % Muncipal Council Area Charge	138.68	
		ALUMINIUM Lead Charges (1 x 246.55)	246.55	
		Completed Rate	3605.68	Sqm
24	39.24	Providing and fixing rolling shutter fabricated from steel laths of minimum thickness 0.9 mm with lock plate of 3.15 mm thickness reinforced with 35 x 35 x 5 mm angle section fitted with sliding bolts and handles for both sides. deep M.S. channel section of depth and thickness not less than 65 mm and 3.15 mm respectively with hold fast arrangements, M.S. Bracket plate 300 x 300 x 3.15 mm minimum size and shape with square bar, suspension shaft of minimum 32 mm diameter, hood cover of M.S. sheet not less than 0.9 mm thickness and of any size at top and safety devices including mechanical gear operation arrangement consisting of worm gear wheels and worms of high grade cast iron or mild steel and one coat of red lead primer etc. complete. (I.S. 62481979) (Without mechanical gear)	4829.00	Sqm
		4 % Muncipal Council Area Charge	193.16	
		Completed Rate	5022.16	Sqm

25	2.26	Conveying materials obtained from road cutting including all lifts, laying in layers of 20cm. to 30cm. breaking clods, dressing to the required lines, curves, grades and section, watering and compacting to not less than 97% of standard proctor density for a lead of 300m. to 500m. inclusive, from the site of excavation to the site of deposition as directed.	393.00	Cum
		4 % Muncipal Council Area Charge	15.72	Cum
		Completed Rate	408.72	Cum
26	21.24	Providing preconstructional antitermite treatment as per I.S. 6313 (Part-II) by treating the top surface of plinth filling at the rate of 5 litres of emulsion concentrate at 1.0 percent of clorophyrifos per One Square Metre of surface area covering ten years guarantee on bond paper	108.00	Sqm
		4 % Muncipal Council Area Charge	4.32	
		Completed Rate	112.32	Sqm
27	50.6	Compacting the sub grade/gravel/oversize metal (200 mm loose) layers for all width with Vibratory roller having weight 8 to 10 MT. including necessary, labour, materials and artificial watering complete.	37.00	No.
		4 % Muncipal Council Area Charge	1.48	
		Completed Rate	38.48	No.
28	2.31	Compacting the hard murum side widths including laying in layers on each side with vibratory roller including artificial watering etc. complete.	21.00	No.
		4 % Muncipal Council Area Charge	0.84	
		Completed Rate	21.84	

29	23.01	Providing and fabricating structural steel work in rolled sections like joists, channels, angles, tees etc. as per detailed design and drawings or as directed including cutting, fabricating, hoisting, erecting, fixing in position making riveted / bolted /welded connections without connecting plates, braces etc. and including one coat of anticorrosive paint and over it two coats of oil painting of approved quality and shade etc. complete.	101844	MT
		4 % Muncipal Council Area Charge	4073.76	
		Completed Rate	105917.76	MT
30	38.04	Providing and fixing corrugated galvanised iron sheets of 0.63mm thick (24 B.W.G.) for roofing without wind tiles including fastening with galvanised iron screws and bolts, lead and bitumen washers as per drawing etc. complete.(Weight of 5.5 Kilogram/sq.m.).	870	Sqm
		4 % Muncipal Council Area Charge	34.80	
		Completed Rate	904.80	Sqm
31	36.11	Providing and applying washable oil-bound distemper of approved colour and shade to old and new surfaces in two coats including scaffolding, preparing the surfaces. (excluding the primer coat.) etc. complete.	48.00	Sqm
		4 % Muncipal Council Area Charge	1.92	
		Completed Rate	49.92	
32	35.14	Providing and applying two coats of water proof cement paint of approved manufacture and of approved colour to old plastered surfaces including scaffolding if necessary, cleaning and preparing the surface, watering for two days etc. complete.	78.00	Sqm
		4 % Muncipal Council Area Charge	3.12	
		Completed Rate	81.12	Sqm
		Royalty Charges		
		(A)For sand		
		Royalty Charges	211.95	
		Surcharge 2%	4.23	
		Distt. mineral Foundation cess 10%	21.19	
		Completed Rate	237.37	Cum
		(B)For all other minerals		
		Royalty Charges	211.95	
		Surcharge 2%	4.23	
		Completed Rate	216.18	Cum

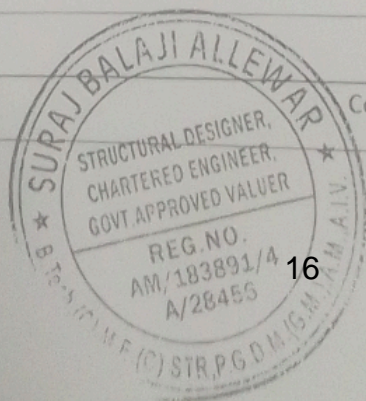

[Handwritten Signature]